



# Ingate SIParator® for SIP Trunking and extending the Mitel MiVoice Connect using Ingate's Native Mitel ShoreSIP Emulation (NMSE)

## Configuration Guide

Version 1.03 of this guide

use with 7.1.1 and apply patch-7.1.1-nmse-mivc-fixes-2.fup

available at <https://ingate.com/patches/patch-7.1.1-nmse-mivc-fixes-2.fup>

Updates: Build version number of Headquarter Server is reflected by NMSE interface  
Setup PRI instead of Analog Loop Start

Dial Plan examples corrections, see NEW 3.3 to make MiVC transfer work

Also set: **Strip ICE attributes in SDPs** under >SIP Services>Interoperability (later planned to be part of NMSE interface)

By selecting PRI Trunk (instead of Analog Loop Start), the DID to Extension mapping table in the MiVC now becomes available and is working with the NMSE interface.

Transfers, which uses SIP REFER needs Dial Plan adjustments in chapter 3.3 to work.

Ingate SIParator® (an SBC/Firewall) version 7.1.1 or later  
Requires the NMSE and CCS Ingate licenses, but requires  
no Mitel vTrunk license nor any Mitel SIP Trunk licenses  
(Mitel has stopped selling extended licenses for the MiVoice Connect)

# About This Document

This document is a guide on how to configure the Mitel MiVoice Connect (MiVC) and the **new Ingate SIParator® feature, the Native Mitel ShoreSIP Emulation (NMSE), for SIP trunking of Mitel MiVoice Connect PBX (formerly Shoretel PBX)**, introduced in software release 7.1.1, without requiring special Mitel equipment or licenses for SIP trunking.

Since the NMSE implementation in the Ingate SIParator® allows the SIParator to reach MiVC clients, e.g. by their extension numbers, the MiVC can both be SIP trunked to the PSTN, replacing the “old copper network” connection, as well as tie trunked to other PBX systems, local or remote, on-premise or in the cloud.

Further, the SIParator’s ability to act as a SIP registrar (under the SRU license), you can extend the MiVC PBX with more capacity and new functionality using equipment following the SIP standard, e.g. SIP telephones or soft clients. Examples of this is shown and exemplified in this guide and more examples of usage are in the plans.

In this document we have left five “good to have” appendices, previously written for the [Configuration Guide for Ingate as Teleworker Gateway for Mitel MiVoice Connect and Mitel 6900 phones](#).

## Day-1 Remote Installation Support for SIP trunking the MiVC

Remote Installation Support is available from three sources at different item numbers:

IGT-0022-03 Remote Installation Support by CTD (North America)

[support@ingate.com](mailto:support@ingate.com) toll free: +1-866-809-0002 NA did: +1-864-551-4216

Sales and ordering: Computer Telephony Distribution (CTD) [ingate@ctdconnect.com](mailto:ingate@ctdconnect.com)  
(866) 533-3331 (toll free), (864) 527-9600 (local)

IGT-0022-02 Remote Installation Support by Educronix (Latin America, also in Spanish)

Educronix LCC also does special projects and Ingate training from a Florida location. Order through Ingate or directly by Educronix at [support@educronix.com](mailto:support@educronix.com) and toll free: +1 855 866 8854

IGT-0022-01 Remote Installation Support by Ingate (Rest of the World)

[support@ingate.com](mailto:support@ingate.com) +46-8 600 7766

Remote Installation Support, per hour (minimum 2h for Mitel SIP Trunking). Additional time beyond the minimum 2 hours is charged afterwards the same hourly rate.

# Contents

<b>1</b>	<b>Introduction</b> .....	<b>4</b>
<b>2</b>	<b>Ingate SIParator® Using Native Mitel ShoreSIP Emulation (NMSE) Explained</b> .....	<b>5</b>
<b>3</b>	<b>Configuration of the Ingate SIParator® for SIP Trunking of the MiVC, using the Native Mitel ShoreSIP Emulation (NMSE)</b> .....	<b>7</b>
3.1	Network Setup .....	8
3.2	Enable the Native Mitel ShoreSIP Emulation (NMSE) at a SIP Trunk GUI Page .....	9
3.3	Adjusting the SIParator® Dial Plan Configured by the Startup Tool (SUT TG) to Use the NMSE Interface .....	10
<b>4</b>	<b>Configure the MiVC to Use Ingate's NMSE-Emulated SG220T1A to get vTrunk Functionality</b> .....	<b>12</b>
4.1	Select an ACCESS CODE (a dialing prefix) on the Trunk Groups page for using the Ingate NMSE Trunk Interface in the MiVC Director .....	12
4.2	Setup a new Platform Equipment – The Ingate SIParator® emulated SG220T1A .....	14
4.3	Create a Trunk for Ingate NMSE Trunk Group in the MiVC Director .....	16
<b>5</b>	<b>Connecting Your MiVC to PSTN SIP Trunk Providers and Other SIP PBXs (tie trunking)</b> .....	<b>17</b>
<b>6</b>	<b>Extending Your Mitel MiVoice Connect (MiVC) with more SIP Equipment and Clients by Using the Ingate SIParator® / Firewall Registrar and User Routing</b> .....	<b>27</b>
<b>7</b>	<b>APPENDIX 1: Configuring ACME for Using Automatically Updated Certificates, e.g. Free Let's Encrypt Certificates</b> .....	<b>30</b>
7.1	Enable the ACME Protocol to Allow Self-updating Certificates .....	30
7.1.1	<i>Create Certificates Between the SIParator® and the Remote Phones</i> .....	32
<b>8</b>	<b>APPENDIX 2: Using Ordinary (NOT Self-Upgrading Using ACME) Third-Party CA Certificates</b> .....	<b>35</b>
8.1	Generating CSR (Certificate Signature Request) in the SIParator® .....	35
8.1.1	<i>Step 1: Produce the Request</i> .....	35
8.1.2	<i>Download the file in any of the 2 formats offerings depending on which one better fits the requirements of the CA you selected to use.....</i>	37
8.1.3	<i>Step 2: Load the CA Signed Certificate</i> .....	37
8.1.4	<i>Not Using the SIParator® to Generate the CSR.....</i>	38
<b>9</b>	<b>APPENDIX 3: CA (Certification Authorities) Root Certificates</b> .....	<b>39</b>
9.1.1	<i>Add the Mitel Root CA for the Mitel Phones.....</i>	39
9.1.2	<i>Also Add the CA for the HQ Server, if Using a 3rd Party Certificate for the HQ Server .....</i>	40
9.1.3	<i>Load the Created Bundle into the SIParator® .....</i>	40
<b>10</b>	<b>APPENDIX 4: Useful Features in The SIParator</b> .....	<b>42</b>
10.1	Add SIP Brute Force Authentication Protection .....	42
10.2	Assure that TTL for Media Packets is Enough for Remote Users .....	43
10.3	Interop Parameters to Adjust .....	43
10.4	Enable Remote SIP Connectivity.....	44
10.5	Configure SIP Traffic Filtering to be Without Restrictions .....	45
<b>11</b>	<b>APPENDIX 5: SIParator® HTTP Services Configuration Exemplified</b> .....	<b>47</b>
11.1	Hosting startup.cfg in the Ingate SIParator® .....	48
11.1.1	<i>Local Files.....</i>	49
11.1.2	<i>Local File Groups.....</i>	50
11.2	Local Endpoints.....	50
11.3	Remote Endpoints Server Groups.....	51
11.4	Remote Endpoints .....	52
11.5	Repositories and Tunnels.....	52

# 1 Introduction

This document describes the steps to configure the Ingate SIParator® (an “E-SBC” often used for connecting PBXs to SIP trunks) and the Mitel MiVoice Connect (formerly ShoreTel PBX) using

Ingate’s Native Mitel ShoreSIP Emulation (NMSE) for SIP trunking, was introduced in version 7.1.1 of the SIParator® software. All supported [Ingate SIParators](#), including current appliances (most S21, all S22, S42, S52, S82, S95, S97 and S98) as well as the Software SIParator® for virtual x86 machines and cloud platforms, can be configured using NMSE for SIP trunking of the MiVoice Connect (MiVC).

## Required Versions and Licenses:

MiVoice Connect (MiVC) PBX (Formerly ShoreTel)<sup>1</sup>

Ingate SIParator® 7.1.1 or later with one NMSE and one CCS license for each concurrent SIP trunk session

A fair knowledge of MiVC Connect, as well as the Ingate SIParator®, is required to be able to follow this document.

The MiVoice Connect Platform Documentation is available at

<https://www.mitel.com/document-center/business-phone-systems%3Amivoice-connect%3Amivoice-connect-platform>

The Ingate SIParator® Documentation is available at

<https://www.ingate.com/Documentation.php>

---

<sup>1</sup> Tested on MiVoice Connect 20.0 HF1 (Build: 23.30.4100.0) but believed to be backwards compatible. Contact Ingate support for any problem.

## 2 Ingate SIParator® Using Native Mitel ShoreSIP Emulation (NMSE) Explained

The MiVoice Connect PBX (MiVC, formerly Shoretel) consist of several appliances or servers connected to local LAN, where the red-underlined can be used to hold the other together in a SIP trunk group that, (most often) via an Ingate SIParator® (an enterprise SBC and Firewall), to connect the MiVC hardware or software devices on the Mitel LAN, to an outside SIP world that may be an ITSP's SIP trunk, over the Internet or on a private IP pipe.

Ingate's Native Mitel ShoreSIP Emulation (NMSE), makes the SIP trunking functionality of the red-underlined hardware or software (Mitel's vTrunk) components obsolete. The NMSE license enables the Mitel-specific protocols required for SIP trunking and connects directly to the local Mitel LAN.

LinuxDVS	ST100DA-T1
SA100	ST1D-T1
SA400	ST200
<u>SG220T1</u>	ST24A
<b>SG220T1A</b>	ST2D-T1
SG24A	ST48A
SG30	ST500
SG50	ST50A
SG50V	vCollab
<u>SG90</u>	vEdgeGW
SG90V	vPhone
SGT1k	<b>vTrunk</b>
ST100A	WinDVS

Ingate has selected to emulate the SIP trunking functionality of the SG220T1A, being a since-long available and (hopefully) stable product requiring no Mitel licenses at all. We have not yet seen any capacity limitations of our emulation.

The SIP trunking functionality you get, is equivalent to Mitel's vTrunk plus the Ingate SIParator, for connecting to "anything using SIP", including ITSP trunking to the PSTN and privately tie-trunking to other SIP PBX services (locally or over the Internet), see chapter **5 Connecting Your MiVC to PSTN SIP Trunk Providers and Other SIP PBXs (tie trunking)**.

The requirement for the NMSE implementation became urgent when Mitel towards the end of 2025 announced:

### ➤ MiVoice Connect End of Extended License Sales fast approaching

- Partners who wish to purchase Ingate SIParator products may continue to do so directly from Ingate:
  - Partners in the US and Canada should contact Ingate's US distributor: Computer Telephony Distributing (CTD)  
[www.ctdconnect.com](http://www.ctdconnect.com)  
(866) 533-3331 (toll free)  
(864) 527-9600 (local)
  - Partners in other countries should contact Ingate directly via email to [sales@ingate.com](mailto:sales@ingate.com)

Email CTD at: [ingate@ctdconnect.com](mailto:ingate@ctdconnect.com)

The Native Mitel ShoreSIP Emulation (NMSE) is straight forward to install and to use. In short, it is an ordinary SIP trunking installation (the NMSE license cost is approximately half of the Mitel SIP trunking cost) that you enable at the Ingate SIParator's SIP Trunk configuration page:

**SIP Trunks**

View trunk: SIP Trunk 4: PSTN;Mitel MiVoice Connect-Shoretel Goto SIP Trunk page

**Device Emulation**

Enable  
 Disable

Copy **MAC Address** used in MiVC Director for this emulated device into column three.

Device	Listen on IP Address	MAC Address	Allow From
<u>SG220T1A</u>	Alias_SG (10.0.1.76)	00:10:49:99:ae:d8	Mitel LAN

The NMSE license is per concurrent session. There are no additional Mitel SIP trunking gear or licenses required:

Mitel Connect Director

Platform Equipment

NAME	DESCRIPTION	SITES	SERVER	DATABASE SERVER	TYPE	IP ADDRESS
EdgeGW		Headquarters	Headquarters		vEdgeGW	10.0.1.90
Headquarters	SoftSwitch	Headquarters	Headquarters	Headquarters	WinHQ	10.0.1.10
Ingate SBC IXNX	Ingate SBC IXNX	Headquarters	Headquarters		InGate	10.0.1.80
Ingate SBC Teleworker	Ingate SBC Teleworker	Headquarters	Headquarters		InGate	10.0.1.2
<input checked="" type="checkbox"/> SG220T1A-NMSE	Ingate Emulated SIP Trunk	Headquarters	Headquarters		SG220T1A	10.0.1.76
<del>SG50-Teleworker room</del>	NOT REQUIRED	Headquarters	Headquarters		SG50	10.0.1.55
<del>SG50-IXNX</del>	Ingate Emulated SG50	Headquarters	Headquarters		SG50	10.0.1.26
<del>SIParator</del>	SIParator	Headquarters	Headquarters		SIParator	10.0.1.1
<del>vPhone3</del>	vPhone3	Headquarters	Headquarters		vPhone3	10.0.1.50
<del>vPhone4</del>	vPhone4	Headquarters	Headquarters		vPhone4	10.0.1.51
<del>vTrunk</del>	vTrunk NOT REQUIRED	Headquarters	Headquarters		vTrunk	10.0.1.86

**In the MiVC you need no HW-trunk, nor any vTrunk, nor any Mitel licenses**

You simply set up your current MiVC PBX to reach the PSTN via the Ingate SIParator® NMSE-emulated SG220T1A.

### 3 Configuration of the Ingate SIParator® for SIP Trunking of the MiVC, using the Native Mitel ShoreSIP Emulation (NMSE)

After activation of the NMSE license on an existing SIParator® installation:

## License Code and Activation



---

**License Code: ONLY USE WITH SOFTWARE VERSION 5.0.6 OR LATER!**

- **MZJ5-2CAN-E72G**

When activated on <https://account.ingate.com>, the license code gives entitlements to the following:

- 5 NMSE, Native Mitel ShoreSIP Emulation Licenses

**Please note!**

1) This License code can only be applied for Ingate units with software version 5.0.6 and later.  
Follow the instruction below, to upgrade the product to use the latest software!

2) If the license code above is for the Ingate Software SIParator/Firewall download, please see the following instructions for installation/activation: <https://www.ingate.com/files/IngateInstallationVirtualMachines.pdf>

**Activate License Codes:**

1. Log on to [www.ingate.com](http://www.ingate.com) and click "Account Login".
2. Login with your Support Account, if you haven't got an account here, please register.
3. Once in your "Account Home Page", if you haven't already done so, choose the option "Register a new unit", enter the Serial Number of your Ingate, then press "Register".
4. In your "Account Home Page", choose the option "Activate Licenses".
5. Enter the license code you find above. (case sensitive, dashes included)
6. Enter the serial number of the machine you wish to bind the license code to, or select "Load my units" and remove all units except the one you wish to bind the license to.
7. Press "Use this License" and the license code is now activated.
8. A key file, "license.lic" will be downloaded to the PC. Note: Annual Support and Software Subscriptions along with Extended Warranty Licenses do not require a file download to the unit.
9. Login to the Ingate unit, go to "Administration - Upgrade" page. Browse to the "license.lic" file and Press upgrade.

**Download Software Upgrades:**

1. Log on to [www.ingate.com](http://www.ingate.com) and click "Account Login".
2. Login with your Support Account, if you haven't got an account here, please register.
3. Once in your "Account Home Page", if you haven't already done so, choose the option "Register a new unit", enter the Serial Number of your Ingate, then press "Register".
4. In your "Account Home Page", choose the option "Download Upgrades".
5. Understand the upgrade path provide in the table, and select the Software Version.
6. Enter the Serial Number of the machine you wish to upgrade, or select "Load my units" and remove all units except the one you wish to upgrade.
7. Press "Download Upgrade" and a software file "upgrade.fup" will be downloaded to the PC.
8. Login to the Ingate unit, go to "Administration - Upgrade" page. Browse to the "upgrade.fup" file and Press "Upgrade" and follow the instructions on the unit.

**Startup Tool:**

The Ingate Startup tool, which is designed to ease the initial configuration of the Ingate products, can be found at [https://account.ingate.com/Startup\\_Tool.php](https://account.ingate.com/Startup_Tool.php).  
You will be asked to login with your Support Account.

For help and support, please see <https://www.ingate.com/Helpdesk.php>.

---

or after a new SIParator® installation, e.g. by using the [Startup Tool](#) as outlined at the bottom of above "License Code and Activation" printout, you need to do the following additional configuration.

### 3.1 Network Setup

At the **Network>All Interfaces** GUI page, you need to define an alias address (here “Alias\_SG”), that should be a free (not already used) IP address of the local LAN that the MiVoice Connect is installed on.

The screenshot shows the 'All Interfaces' configuration page. The 'Alias' section is highlighted with a red box. It contains a table with the following data:

Name	DNS Name or IP Address	IP Address	Interface	Delete Row
Alias_SG	10.0.1.76	10.0.1.76	Ethernet0 (eth0)	<input type="checkbox"/>


and at the **Network>Network and Computers** GUI page, you need to have a network name (here “Mitel LAN”) that includes all MiVoice Connect components.

The screenshot shows the 'Network and Computers' configuration page. A table lists network configurations, with a row for 'Mitel LAN' highlighted in red. The table has the following structure:

Edit Row	Name	Subgroup	Lower Limit		Upper Limit (for IP ranges)		File	Interface/VLAN	Delete Row
			DNS Name or IP Address	IP Address	DNS Name or IP Address	IP Address			
<input type="checkbox"/>	+ Mitel LAN	-	10.0.1.0	10.0.1.0	10.0.1.255	10.0.1.255	-	-	<input type="checkbox"/>

### 3.2 Enable the Native Mitel ShoreSIP Emulation (NMSE) at a SIP Trunk GUI Page

Go to the SIP trunk page to be used (typically SIP Trunk 1), where you have activated the NMSE licenses:

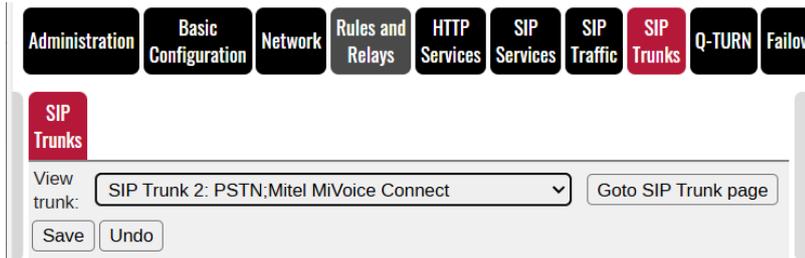

and at the bottom of the SIP trunk page enable “Device Emulation”:

Setup for the PBX (Help)

Use PBX from other SIP trunk  
 Define PBX settings

PBX Name:  (Unique descriptive name)  
Use alias IP address:  (Forces this source address from our side)

PBX Registration SIP Address	Authentication		PBX IP Address		PBX Domain Name
	User ID	Password	DNS Name or IP Address	IP Address	
<input type="text"/>	<input type="text"/>	<input type="text" value="Change Password"/>	<input type="text"/>	<input type="text"/>	10.0.1.86

(At least one of PBX Registration, IP address or Domain Name is required to locate the PBX)

PBX Network:   
Signaling transport:  (\* = Automatic)  
Port number:   
Match From Number/User in field:   
Common User Name suffix:   
To header field:   
Forward incoming REFER:   
Send DTMF via SIP INFO:   
Remote Trunk Group Parameters usage:  (\* = Don't use TGP)  
Local Trunk Group Parameters usage:  (\* = Don't use TGP)

**Device Emulation**

Enable  
 Disable

Copy MAC Address used in MiVC Director for this emulated device into column three.

Device	Listen on IP Address	MAC Address	Allow From
<input type="text" value="SG220T1A"/>	<input type="text" value="Alias_SG (10.0.1.76)"/>	<input type="text" value="00:10:49:99:ae:d8"/>	<input type="text" value="Mitel LAN"/>

Save Undo Look up all IP addresses again

Enter the MAC address used at the MiVC side here (These MAC addresses must match)

select the Device SG220T1A, the Alias IP defined above, the MAC address you setup in the Director of the MiVC (the three first hex digits are pre-defined by Mitel and select e.g. 1a:2b:3c for the last three hex digits (must be unique on the Mitel LAN). **The MAC address MUST BE THE SAME as used at the MiVC side (seen in the MiVC Director).** (You must only enable the SG220T1A emulation at one of a SIParator’s SIP Trunk pages, but you may use it towards several ITSP PSTN trunks and several other PBX tie trunks.)

### 3.3 Adjusting the SIParator® Dial Plan Configured by the Startup Tool (SUT TG) to Use the NMSE Interface

Dial Plan configuration is more extensively described in section 5 Connecting Your MiVC to PSTN SIP Trunk Providers and Other SIP PBXs (tie trunking) and 6 Extending Your Mitel MiVoice Connect (MiVC) with more SIP Equipment and Clients by Using the Ingate SIParator® / Firewall Registrar and User Routing.

The startup tool does not consider the NMSE interface, so (at least currently) the Dial Plan setup by the startup tool, needs some adjustments. This is the Dial Plan as typically setup for plain SIP trunking:

Changes have been made to the preliminary configuration, but have not been applied.

Methods Filtering Local Registrar Authentication Accounts STIR Call Control **Dial Plan** Routing Accounting Time Classes IDS/IPS Test Agent Status

Use Dial Plan (Help) Emergency Number (Help)  
 On 911  
 Off  
 Fallback

Matching From Header (Help)

Name	Use This ...		... Or This	Transport	Network	Delete Row
	Username	Domain	Reg Expr			
ShoreTel Shore	*	*		Any	ShoreTel ShoreGear	<input type="checkbox"/>
WAN	*	*		Any	WAN	<input type="checkbox"/>

Add new rows 1 rows.

Matching Request-URI (Help)

Name	Use This ...					... Or This	Delete Row
	Prefix	Head	Tail	Min. Tail	Domain	Reg Expr	
Outbound			-			sip:(.*)@10.0.1.86	<input type="checkbox"/>

Add new rows 1 rows.

Forward To (Help)

Name	No.	Use This ...		... Or This		... Or This	... Or This	Use Alias IP	Delete Row
		Account	Replacement Domain	Port	Transport	Reg Expr	Trunk		
Generic (no register)	1	-			-		SIP Trunk 1: Generic (no register);ShoreTel ShoreGear	<input type="checkbox"/>	

Add new rows 1 groups with 1 rows per group.

Dial Plan (Help)

No.	From Header	Request-URI	Action	Forward To	Add Prefix		ENUM Root	Time Class	Comment	Delete Row
					Forward	ENUM				
1	ShoreTel ShoreGear	Outbound	Forward	Generic (no register)			-	-		<input type="checkbox"/>
2	WAN	-	Reject	-			-	-		<input type="checkbox"/>

Add new rows 1 rows.

First you need to insert the alias address (Alias\_SG, 10.0.1.76), that we defined above in 3.1 into the Matching Request-URI, to be sip:(.\*)@10.0.1.76.

Then, since the NMSE interface includes its own SIP REFER handling for transfers from the MiVC, we need to add Dial Plan routing for the SIP INVITE etc. that the NMSE will generate.

At the **Network>All Interfaces** GUI page, let's give the internal IP address of the SIParator® (localhost) 127.0.0.1 a name:

Name	Subgroup	Lower Limit		Upper Limit (for IP ranges)		File	Interface/VLAN	Delete Row
		DNS Name or IP Address	IP Address	DNS Name or IP Address	IP Address			
+ 127001	-	127.0.0.1	127.0.0.1	127.0.0.1	127.0.0.1	Add	-	<input type="checkbox"/>
+ LAN	-	10.0.1.0	10.0.1.0	10.0.1.255	10.0.1.255	Add	inside (eth0 untagged)	<input type="checkbox"/>
+ PBX	-	10.0.1.86	10.0.1.86			Add	-	<input type="checkbox"/>

Then add the four red-framed rows to the Dial Plan resulting in:

Matching From Header (help)

Name	Use This ...		... Or This	Transport	Network	Delete Row
	Username	Domain	Reg Expr			
ShoreTel Shore	*	*		Any	ShoreTel ShoreGear	<input type="checkbox"/>
WAN	*	*		Any	WAN	<input type="checkbox"/>
local127001	*	*		Any	127001	<input type="checkbox"/>

Add new rows 1 rows.

Matching Request-URI (help)

Name	Use This ...					... Or This	Delete Row
	Prefix	Head	Tail	Min. Tail	Domain	Reg Expr	
Outbound			-			sip:(.*)@10.0.1.76	<input type="checkbox"/>
dest_extnumbe			-			sip:(6[0-9][0-9][0-9])@.*	<input type="checkbox"/>

Add new rows 1 rows.

Forward To (help)

Name	No.	Use This ...		... Or This		... Or This		Use Alias IP	Delete Row
		Account	Replacement Domain	Port	Transport	Reg Expr	Trunk		
Generic (no reg)	1	-			-		SIP Trunk 1: Generic (no register);ShoreTel ShoreGear	-	<input type="checkbox"/>
to_nmse	1	-			-	\$1@10.0.1.76	-	-	<input type="checkbox"/>

Add new rows 1 groups with 1 rows per group.

Dial Plan (help)

No.	From Header	Request-URI	Action	Forward To	Add Prefix		ENUM Root	Time Class	Comment	Delete Row
					Forward	ENUM				
1	local127001	dest_extnumbers	Forward	to_nmse			-	-		<input type="checkbox"/>
2	ShoreTel ShoreGear	Outbound	Forward	Generic (no register)			-	-		<input type="checkbox"/>
3	WAN	-	Reject	-			-	-		<input type="checkbox"/>

Add new rows 1 rows.

Notice that the green-framed regular expression `sip:(6[0-9][0-9][0-9])@.*` is adapted to the extension number range used by the specific MiVC in use, here exemplified using 6xxx (six thousand series of extension numbers).

## 4 Configure the MiVC to Use Ingate's NMSE-Emulated SG220T1A to get vTrunk Functionality

The Ingate SIParator with software 7.1.1 or higher will – with the NMSE license and the below yellow highlighted configuration – give the functionality of the Mitel MiVC vTrunk (only for comparison, no vTrunk needs to be present):

**vTrunk:**

**GENERAL** | **SWITCH**

Max SIP trunk capacity (G.711): 500/1000 with/without ad

SIP trunks configured:

With the NMSE license, the **Ingate SIParator gives the same functionality as the vTrunk**, but requires NO Mitel licenses (by selecting an SG220T1A, PRI, but emulating SIP trunking only).

For 30 concurrent calls, you need 30 CCS and 30 NMSE licenses from Ingate

To setup the MiVC to use an Ingate SIParator<sup>®</sup> NMSE (Native Mitel ShoreSIP Emulation) trunk, you first setup the **Trunk Groups**, then the **Platform Equipment** and then the **Trunk**.

### 4.1 Select an ACCESS CODE (a dialing prefix<sup>2</sup>) on the Trunk Groups page for using the Ingate NMSE Trunk Interface in the MiVC Director

At the Mitel Connect Director>ADMINISTRATION>**Trunk Groups** page:

NAME	TYPE	SITE	TRUNKS	DID	DNIS	OSE	ACCESS CODE
DWS Test TG	Digital Wink Start	Headq...	0	<input type="checkbox"/>	<input type="checkbox"/>	No	32
SG50 Group	Analog Loop Start	Headq...	2	<input type="checkbox"/>	<input type="checkbox"/>	No	31
NMSE Trunk Group	PRI	Headq...	1	<input type="checkbox"/>	<input type="checkbox"/>	No	9
PSTN Trunk Telavox	SIP	Headq...	3	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Yes	35
Test TG	Analog Loop Start	Headq...	2	<input type="checkbox"/>	<input type="checkbox"/>	No	33
T1 Trunk SG220T1A	PRI	Headq...	23	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	No	36
T1 Trunk SG220T1	PRI	Headq...	23	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	No	38

To create this new row ————— press the **NEW** button at the top to the right

**NEW** | COPY | DELETE | BULK DELETE

<sup>2</sup> If you already have a traditional PSTN connection for your MiVC, e.g. using dialing prefix (or access code) 9 to reach out of your company and want to continue to use 9 for the new SIP connection, it is recommended that you replace 9 with another available access code (if needed, you can expand the access code range at Director>ADMINISTRATION>System>Dialing Plan>**Dial Plan**), e.g. with 39, and setup the new Ingate SIParator<sup>®</sup> NMSE SIP trunking using dialing prefix 9.

and in the lower part of that page these three tabs will appear.

At the **GENERAL** tab:

**New Trunk Group**

**GENERAL** INBOUND OUTBOUND

Name:

Site:

Trunk type:

Language:

Profile:

Note:

Give it a descriptive name e.g. "NMSE Trunk Group"

**IMPORTANT: Select Trunk type "PRI" (not "SIP")**

(If SIP would be selected, Mitel SIP trunk session licenses would be required. **The Ingate SIParator NMSE Emulation will do SIP**, and nothing else, anyway.)

PRI

Analog Loop Start

Analog DID

Digital Loop Start

Digital Wink Start

**PRI**

SIP

on the **INBOUND** tab, fill in Number of digits from CO:

**GENERAL** **INBOUND** OUTBOUND

Number of digits from CO:

DNIS [Edit DNIS](#)

DID [Edit DID Range](#)

Extension

Translation table:

Prepend dial in prefix:

Use site extension prefix

Tandem trunking

User group:

Prepend dial in prefix:

Destination:

at the **OUTBOUND** tab, **select the prefix** and the local **area code** (at the locality the phone clients are supposed to be) for this trunk group.

**NMSE Trunk Group**

**GENERAL** INBOUND **OUTBOUND**

Outgoing:

**Network call routing:**

Access code:

Local area code:

Additional local area codes:

Add

Fill in a unique Access code (dialing prefix)

Fill in Local area code use

Then press the **SAVE** button to the right



## 4.2 Setup a new Platform Equipment – The Ingate SIParator® emulated SG220T1A

At the Mitel Connect Director > ADMINISTRATION > Appliances/Servers > **Platform Equipment** page:

NAME	DESCRIPTION	SITES	SERVER	DATABASE SERVER	TYPE	IP ADDRESS	SECC ADDR	MAC ADDRESS	SER
EdgeGW		Headq...	Headq...		vEdgeGW	10.0.1.90		BC-24-11-9A-6B-8B	
Headquarters	SoftSwitch	Headq...	Headq...	Headquar...	WinHQ	10.0.1.10		00-00-00-00-00-00	
Ingate SBC IXNX	Ingate SBC IXNX	Headq...	Headq...		InGate	10.0.1.80		6E-90-1B-1C-DE-B0	
Ingate SBC Teleworker	Ingate SBC Teleworker	Headq...	Headq...		InGate	10.0.1.2		bc-81-1f-00-13-95	
Ingate SBC w NMSE	IG classic SBC part	Headq...	Headq...		InGate	10.0.1.75		bc-24-11-99-ae-d8	
SG220T1 server room		Headq...	Headq...		SG220T1	10.0.1.85		00-10-49-1A-D6-1E	ST1J
SG220T1A server room		Headq...	Headq...		SG220T1A	10.0.1.84		00-10-49-19-40-d3	T1AJ
<input checked="" type="checkbox"/> SG220T1A-NMSE	Ingate Emulated SIP ...	Headq...	Headq...		SG220T1A	10.0.1.76		00-10-49-99-ae-d8	

To create this new row — press the **NEW** button at the top to the right



and in the lower part of that page this **GENERAL** tab will appear:

**SG220T1A: -**

**GENERAL**

Site: Headquarters

Hardware type: SG220T1A

Name: \*

Description: \*

IP address: \*

MAC address: 00-10-49- [ ]

Fully qualified domain name: (If address of Internet gateway)

Server to manage switch: Headquarters

Caller's emergency service identification (CESID):

Note:

**Select Hardware type SG220T1A and these fields will show up:**

**Fill in a Name**

**Fill in a Description**

**Fill in the alias IP address defined in the Ingate SIParator as defined in 3.1 Network Setup**

Alias\_SG 10.0.1.76

Fill in the above and press the **SAVE** button to the right.



You will be prompted for a FQDN for the IP address (below 10.0.1.76), but although it is not necessary to setup DNS for that IP address, it is good to have (and be able to use, e.g. in the SIParator® Dial Plan).

Mitel provides these three first hex digits of the MAC address and you should add the last three hex digits – any unique hex digits (e.g. a1-b2-c3) will be ok, BUT **THE FULL MAC ADDRESS MUST BE THE SAME AS USED IN THE Ingate SIParator.**

We should then have got this and can proceed to the **SWITCH** tab.

**SG220T1A: SG220T1A-NMSE - 10.0.1.76**

**GENERAL**    **SWITCH**

Name: SG220T1A-NMSE  
Description: Ingate Emulated SIP Trunk  
Site: Headquarters [Go to this site](#)  
IP address: 10.0.1.76  
MAC address: 00-10-49-99-ae-d8

**Check that this MAC address is the same as used on the Ingate side (see section 3.2 above)!**

At the **SWITCH** tab at the bottom **Platform Equipment** page, select the red-framed and provide a Description:

**SG220T1A: SG220T1A-NMSE - 10.0.1.76**

**GENERAL**    **SWITCH**

**Built-in capacity:**  
IP phone + SIP trunks = Total  
70    0    70 of 70 (0 SIP proxy ports)

Enable Jack based Music on hold  
Jack based Music on hold gain: 0 dB (-49 to 13)

Use analog extension port as DID trunks

Assign digital ports as 14 SIP Trunks with Media Proxies (Assign analog ports for up to 6 additional media proxies)

Port	Port Type	Trunk Group	Description	Jack Number	Tx Gain (dB)
1	Available				0.0
2	Available				0.0
...					
12	Available				0.0

**Layer 3:**  
Protocol type: ISDN User  
Central office type: NI-2  
Call by Call service: <None>

Enable outbound calling name

**Layer 2:**  
Signalling:

**Layer 1:**  
Clock source: Slave  
Framing format: ESF  
Line code: B8ZS  
Line build out: 0.5 dB (0 - 110 feet)

**Digital ports:**

Port	Port Type	Trunk Group	Description	Jack Numt
1	Trunk	NMSE Trunk Group	Emulated by Ingate SIParator	
2	Available			


Then press the **SAVE** button to the right

**SAVE**    **RESET**    **CANCEL**

### 4.3 Create a Trunk for Ingate NMSE Trunk Group in the MiVC Director

(This may have happened automatically by the previous step)

At the Mitel Connect Director > ADMINISTRATION > **Trunks** page:

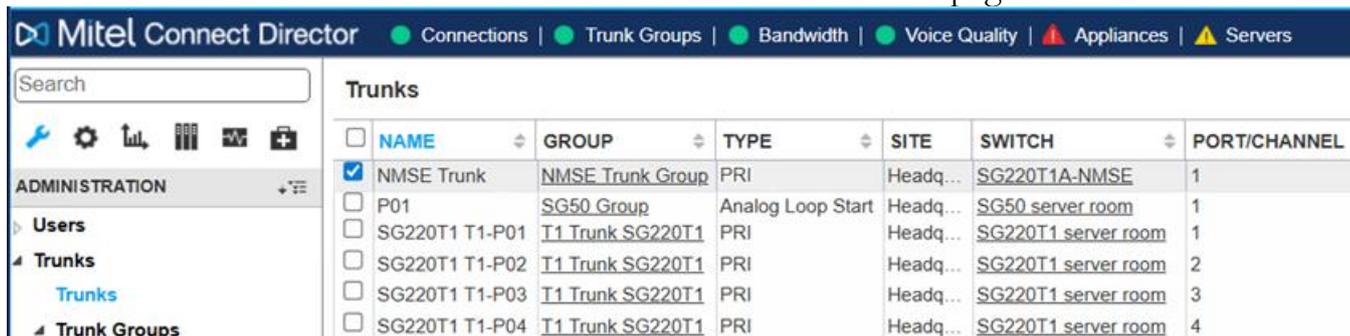

Create a new trunk by pressing the **NEW** button at the top to the right



and in the lower part of that page will appear:

**NMSE Trunk**

**GENERAL**

Site: Headquarters

Trunk group: NMSE Trunk Group (PRI)

Number: NMSE Trunk


Switch port: SG220T1A-NMSE 1

Jack #:

Fill in a name for the trunk

Select the equipment Name we defined in 4.2

Then press the **SAVE** button to the right



row at the upper half of this Director GUI page will appear.

## 5 Connecting Your MiVC to PSTN SIP Trunk Providers and Other SIP PBXs (tie trunking)

The Ingate SIParator<sup>®</sup>/Firewall is often referred to as the “Swiss Army Knife” for real-time communication, meaning SIP routing, SIP interoperability as well as enterprise and SIP firewalling, specially through its flexible SIP Dial Plan and multiple SIP Trunks configuration possibilities. For each set of concurrent call licenses (CCS licenses) you buy, you get the option to apply these new CCS licenses to an existing or new SIP Trunk GUI page that will allow integration with another SIP environment.

These capabilities have existed in the Ingate SIParator<sup>®</sup> (often called just SBC or E-SBC) for over a decade, but in the highly popular MiVoice Connect/ShoreTel PBX environment – where the Ingate SIParator<sup>®</sup> has been an OEM component since 2008(!) – the Ingate SIParator has mostly been used for “plain SIP trunking”, i.e. connecting the PBX to the Public Switched Telephone Network (the PSTN) over an IP network rather than over the old “copper network”.

Now, with the Native Mitel ShoreSIP Emulation (NMSE) introduced in software release 7.1.1, we expect the MiVC – many still being connected or “trunked” to the PSTN over copper lines – to move over to a SIP IP connection to the PSTN, but ALSO to use SIParator<sup>®</sup> for “**tie trunking**”.

This section is written to provide an understanding and overview, to exemplify setup and to point out relevant information the new **tie trunking for migrating to whatever is to come, on-premise or in the cloud**, to improve the total enterprise PBX experience.

**There are two useful guides** that will be referenced:

[How To SIP Trunking Using the SIP Trunk Page](#), and

[How To use Generic Header Manipulation](#)

and there are extensive help texts ([Help](#)) in the SIParator GUI (in addition to the reference manual [Ingate Reference Guide](#)), to detail how to configure and use for:

**Connecting Your MiVC to PSTN SIP Trunk Providers**, as well as

**Connecting Your MiVC to Other SIP PBXs (tie trunking)**

In these examples, assume the company Igcomp has a SIParator @igcomp.ess-s.io, with its configuration GUI reachable by a web browser at:



and in the previous sections, we setup at the Mitel MiVoice Connect–Shoretel PBX at the bottom of SIP Trunk 4 GUI page:

**Setup for the PBX** (Help)

Use PBX from other SIP trunk

Define PBX settings

PBX Name:  (Unique descriptive name)

and enabled the Mitel Native ShoreSIP Emulation (NMSE) under “Device Emulation”:

**Device Emulation**

Enable

Disable

Copy **MAC Address** used in MiVC Director for this emulated device into column three.

Device	Listen on IP Address	MAC Address	Allow From
<input type="text" value="SG220T1A"/> ▼	<input type="text" value="Alias_SG (10.0.1.76)"/> ▼	<input type="text" value="00:10:49:99:ae:d8"/>	<input type="text" value="Mitel LAN"/> ▼

Before going into how tie trunking to another IG-LAN is done, let’s rehearse how the SIParator’s Dial Plan and SIP Trunk typically are setup (e.g. by the startup tool, SUT TG), by these three cuts from [How To SIP Trunking Using the SIP Trunk Page](#):

There is one Dial Plan that can trap outgoing calls meant for a certain SIP Trunk (that there may be many of):

## 2 Setting up SIP Trunking

This section describes the functioning and set-up of the SIP Trunk page in the Ingate. Please remember that these settings, as well as most of the other ones in this description, usually are done by the Startup Tool TG and that this description is provided for reference.

### 2.1 Defining Outgoing Call Handling in the Dial Plan

Outgoing calls are processed through the Dial Plan, which must be **On**. At a minimum, the fields exemplified below must be entered. The actual Dial Plan table is searched line by line from the top for a match from the PBX of the dialed number where after it is forwarded to the SIP Trunk page.

- 1) Calls from the PBX connected to network "ShoreTel"
- 2) ...with a any dialed number send sent to this unit (regular expression (.\*)@10.100.0.13)
- 3) ...will be forward for further processing to "Gamma Trunk"
- 4) ...which is defined on SIP Trunk page 1

SIP Methods Filtering Local Registrar Authentication and Accounting SIP Accounts **Dial Plan** Routing Time Classes SIP Status IDS/IPS SIP Test SIP Test Status

**Use Dial Plan** (Help)  On  Off  Fallback **Emergency Number** (Help) 911

**Matching From Header** (Help)

Name	Use This ...		... Or This	Transport	Network	Delete Row
	Username	Domain	Reg Expr			
1) PBX	*	*		UDP	ShoreTel	<input type="checkbox"/>
WAN	*	*		Any	WAN	<input type="checkbox"/>

Add new rows 1 rows.

**Matching Request-URI** (Help)

Name	Use This ...					... Or This	Delete Row
	Prefix	Head	Tail	Min. Tail	Domain	Reg Expr	
2) Callout			-			sip:(.*)@10.100.0.13	<input type="checkbox"/>

Add new rows 1 rows.

**Forward To** (Help)

Name	Subno.	Use This ...		... Or This		... Or This	... Or This	Delete Row
		Account	Replacement Domain	Port	Transport	Reg Expr	Trunk	
4) Gamma Trunk	1	-					SIP Trunk 1: Gamma,Shoretel	<input type="checkbox"/>

Add new rows 1 groups with 1 rows per group.

**Dial Plan** (Help)

No.	From Header	Request-URI	Action	Forward To	Add Prefix		ENUM Root	Time Class	Comment	Delete Row
					Forward	ENUM				
3) 1	PBX	Callout	Forward	Gamma Trunk			-	-		<input type="checkbox"/>
2	WAN	-	Reject	-			-	-		<input type="checkbox"/>

At 4) in above cut, you see a **Forward To** SIP Trunk 1: Gamma;Shoretel in this cut:

The screenshot displays the configuration interface for SIP Trunk 1, divided into several sections:

- SIP Trunking Service Parameters:** Includes fields for Service name (Gamma), Service Provider Domain (83 245 6 117), Restrict to calls from (Gamma Telecom), Outbound Proxy, Use alias IP address, Outbound Gateway, Signaling Transport (UDP), From header domain (Provider domain), Host name in Request-URI of incoming calls, Trunk Group Parameters (RFC 4004), Preserve Max Forwards (No), Relay media for remote users (No), Exactly one Via header (No), Hide Record-Route (No), Show only one To tag (No), SIP 3xx redirection to provider domain (No), SIP 3xx redirection to caller domain (No), Route incoming based on (Request-URI), Service Provider domain is trusted (No), Use P-Preferred-Identity (No), and Max simultaneous calls.
- Main Trunk Line:** A table with columns for No., Reg., Used when not defined below, Display Name, Username, Identity, User ID, Password, Incoming Trunk Match, and Forward to. Row 1 shows a configuration for 1306770748.
- PBX Lines:** A table with columns for No., Reg., From PBX Number/User, Display Name, Username, Identity, User ID, Password, Incoming Trunk Match, Forward to PBX Account, and Delete Row. It lists two lines: one for 130677070-99(2) and one for anonymous.
- SIP Lines:** A table with columns for No., Reg., From SIP Number/User, Display Name, Username, Identity, User ID, Password, Incoming Trunk Match, Forward to SIP Account, and Delete Row. It shows one line for anonymous.
- Setup for the PBX:** Includes PBX Name (Shoretel), Use alias IP address, a table for PBX Registration SIP Address (User ID, Password, DNS Name or IP Address, IP Address, PBX Domain Name), PBX Network (ShoreTel), Signaling transport, Port number, Match From Number/User in field (From URI), To header field (Same as Request-URI), and Trunk Group Parameters usage.

SIP Trunking Service Parameters

Registration to and Authentication for the Trunking Service  
Outgoing and Incoming Number Routing

PBX Parameters

Each SIP Trunk has its own configuration GUI page, where the top portion is the configuration towards the remote end (e.g. a SIP trunking provider that we have defined at SIP Trunk 4 or another PBX environment that we will exemplify tie trunking to at SIP Trunk 2).

The bottom portion is the configuration towards the local PBX, that we at SIP Trunk 4,

Define PBX settings

setup towards: PBX Name:  with its NMSE emulation

and at bottom portion of SIP Trunk 2 and we will re-use the same Mitel MiVoice Connect-Shoretel PBX configuration by:

**Setup for the PBX** (Help)

Use PBX from other SIP trunk

Define PBX settings

PBX from: Mitel MiVoice Connect-Shoretel ▾

In the middle portion of each SIP Trunk GUI page, we have:

A:		C: Calls from a specific user will use the trunk line defined here.				B: Credentials for Trunk Service		D: Incoming calls will be sent to a specific user here.	
<b>Main Trunk Line</b> (Help)									
		Outgoing Calls				Authentication		Incoming Calls	
No.	Reg	Display Name	User Name	Identity	User ID	Password	Incoming Trunk Match	Forward to	
1	Yes	LEAVE EMPTY!		1305670700	1305670700@tservice.c	305670700	Change Password		
<b>PBX Lines</b> (Help)									
		Outgoing Calls				Authentication		Incoming Calls	
No.	Reg	From PBX Number/User	Display Name	User Name	Identity	User ID	Password	Incoming Trunk Match	Forward to PBX Account
1	No	13056707[[0-8][0-9]]	13056707\$1	13056707\$1			Change Password	0(13056707[0-8][0-9])	\$1
2	No	anonymous		anonymous@anonymou			Change Password		
Add new rows: 1 rows.									
<b>SIP Lines</b> (Help)									
		Outgoing Calls				Authentication		Incoming Calls	
No.	Reg	From SIP Number/User	Display Name	User Name	Identity	User ID	Password	Incoming Trunk Match	Forward to SIP Account
1	No	steven	Steven Brown	01305670790			Change Password	01305670790	steven
2	No	/+1305670799	Fax	01305670799			Change Password	01305670799	+1305670799
3	No	pda[9[0-9]]		13056707\$1			Change Password	013056707(9[0-9])	pda\$1

and understand that outgoing calls are forwarded by the Dial Plan to red-framed column C; while incoming on a certain SIP Trunk, goes directly to red-framed column D: for a match and forwarding.

In these rows of SIP forwarding, you can use both numbers and SIP names, regular expressions and generic header manipulation to do everything needed, both simple setup and complex fixes to various SIP environments.

Under **PBX lines** you see some usage of regular expressions, and the simplest is (.\*) which matches and stores any amount of characters in \$1. In section 3.2 of [How To use Generic Header Manipulation](#), you find the full notation for regular expressions, where one example of usage is:

Incoming Trunk Match	Forward to
\+1306(7707[0-9]{2})	0\$1
\+1306(7707[0-9]{2})	0\$1;user=phone

With the above understanding of SIP routing, let's see how to setup Igacomp's SIParator®:



where the top of SIP Trunk 4 GUI page, handle the connection to the PSTN, which configuration can be as easy as this (although the SIParator® has extensive possibilities to handle any trunk):

Service name:	<input type="text" value="PSTN"/>	<i>(Unique descriptive name)</i>
Service Provider Domain:	<input type="text" value="80.81.82.83"/>	<i>(FQDN or IP address)</i>
Restrict to calls from:	<input type="text" value="Telavox_Trunks"/>	<i>( '-' = No restriction)</i>
Outbound Proxy:	<input type="text"/>	<i>(FQDN or IP address)</i>
Use alias IP address:	<input type="text" value="-"/>	<i>(Forces this source address from our side)</i>
Outbound Gateway:	<input type="text" value="-"/>	<i>( '-' = Use Default Gateway)</i>
Signaling Transport:	<input type="text" value="UDP"/>	<i>( '-' = Automatic)</i>
Port number:	<input type="text"/>	
From header domain:	<input type="text" value="Provider domain"/>	

and at the top of SIP Trunk 2 , we handle the connection to the IG-LAN environment, where there is another PBX that we want to integrate with, to allow communication with the same Mitel MiVoice Connect-Shoretel PBX (at the NMSE interface) using extension numbers instead of DID, thus NOT going over PSTN. Notice that the NMSE interface can handle both DID and extension numbers at the same time, which was not possible going through a Mitel vTrunk (or SG device, where a MiVC configured trunk either is for the PSTN or for a tie trunk):

Service name:	<input type="text" value="IG-LAN"/>	(Unique descriptive name)
Service Provider Domain:	<input type="text" value="10.48.255.1"/>	(FQDN or IP address)
Restrict to calls from:	<input type="text" value="Ingate tie-trunk"/>	('-' = No restriction)
Outbound Proxy:	<input type="text"/>	(FQDN or IP address)
Use alias IP address:	<input type="text" value="-"/>	(Forces this source address from our side)
Outbound Gateway:	<input type="text" value="-"/>	('-' = Use Default Gateway)
Signaling Transport:	<input type="text" value="TCP"/>	('-' = Automatic)
Port number:	<input type="text"/>	
From header domain:	<input type="text" value="Provider domain"/>	
Host name in Request-URI of incoming calls:	<input type="text" value="10.48.112.112"/>	(Trunk ID - Domain name)

where the last line is an additional ethernet port configured to connect to IG-LAN, setup at the **Network>All Interfaces** GUI page:

<input type="text" value="IG_LAN"/>	<input type="text" value="Static"/>	<input type="text" value="10.48.112.112"/>	<input type="text" value="10.48.112.112"/>	<input type="text" value="16"/>	<input type="text" value="10.48.0.0"/>	<input type="text" value="10.48.255.255"/>	<input type="text" value="Ethernet"/>
-------------------------------------	-------------------------------------	--	--	---------------------------------	--	--	---------------------------------------

The SIP Trunk to the PSTN (typically setup by the startup tool, SUT TG), here at SIP Trunk 4  (where a PBX like the MiVC handles the SIP addressing to and from the PSTN trunk itself, the SIParator typically just forwards the numbers), thus the middle portion the SIP Trunk GUI page may look like:

Main Trunk Line (Help)									
No.	Reg	Outgoing Calls				Authentication		Incoming Calls	
		Display Name	User Name	Identity	User ID	Password	Incoming Trunk Match	Forward to	
1	No		\$(user.name)			Change Password	(.*)	\$1	

PBX Lines (Help)									
No.	Reg	Outgoing Calls				Authentication		Incoming Calls	
		From PBX Number/User	Display Name	User Name	Identity	User ID	Password	Incoming Trunk Match	Forward to PBX Account
2	No	anonymous		anonymous@anonym		Change Password			
3	No	(*)		\$1		Change Password	(.*)	\$1	

But at SIP Trunk 2 , it is set up to forward any incoming call, **starting with 1 followed by two digits**, to the MiVC PBX at IP address 10.0.1.76 (which is the NMSE interface):

Main Trunk Line (Help)									
No.	Reg	Outgoing Calls				Authentication		Incoming Calls	
		Display Name	User Name	Identity	User ID	Password	Incoming Trunk Match	Forward to	
1	No		\$(from.user)			Change Password	(1[0-9][0-9])	\$1@10.0.1.76	

This is done by the regular expression (1[0-9][0-9]) that evaluates to \$1@10.0.1.76.

That NMSE emulation at SIP Trunk 4, will also be used for SIP Trunk 2 that instead of connecting to the PSTN, now connects to the IG-LAN PBX environment

which applies for INCOMING CALLS.

For OUTGOING CALLS, the Dial Plan in the SIParator® is used

Administration Basic Configuration Network HTTP Services SIP Services SIP Traffic SIP Trunks

Methods Filtering Registrar Authentication Accounts STIR Call Control **Dial Plan**

Use Dial Plan (Help) Emergency Number (Help)

On  Off  Fallback

911 9911

Matching From Header (Help)

Name	Use This ...		... Or This	Transport	Network	Delete Row
	Username	Domain	Reg Expr			
all_ipv4	*	*		Any	All-IPv4	<input type="checkbox"/>
from_inside	*	*		Any	Local-and-IG	<input type="checkbox"/>
from_nmse	*	10.0.1.76		UDP	-	<input type="checkbox"/>
local127001	*	*		Any	127001	<input type="checkbox"/>

Add new rows 1 rows.

Matching Request-URI (Help)

Name	Use This ...				... Or This	Delete Row
	Prefix	Head	Tail	Min. Tail	Domain	
dest_1xx			-		Reg Expr: sip:(1[0-9][0-9])@.*	<input type="checkbox"/>
dest_6xx			-		Reg Expr: sip:(6[0-9][0-9])@.*	<input type="checkbox"/>
dest_extnumbe			-		Reg Expr: sip:(6[0-9][0-9][0-9])@.*	<input type="checkbox"/>
less5digits			0..9, +, -, #, *	4		<input type="checkbox"/>

Add new rows 1 rows.

Forward To (Help)

Name	No.	Use This ...	... Or This			... Or This	Use Alias IP	Delete Row	
		Account	Replacement Domain	Port	Transport	Reg Expr			Trunk
+ to_ig-lan	1	-			-		SIP Trunk 2: IG-LAN;Mitel MiVoice Connect	-	<input type="checkbox"/>
+ to_nmse	1	-			-	\$1@10.0.1.76	-	-	<input type="checkbox"/>
+ to_pstn	1	-			-		SIP Trunk 4: PSTN_Telavox;Mitel MiVoice Connect	-	<input type="checkbox"/>

Add new rows 1 groups with 1 rows per group.

Dial Plan (Help)

No.	From Header	Request-URI	Action	Forward To	Add Prefix		ENUM Root	Time Class	Comment	Delete Row
					Forward	ENUM				
1	local127001	dest_extnumbers	Forward	to_nmse			-	-		<input type="checkbox"/>
2	from_inside	dest_6xx	Forward	to_ig-lan			-	-		<input type="checkbox"/>
3	from_inside	dest_1xx	Forward	to_nmse			-	-		<input type="checkbox"/>
4	from_inside	-	Forward	to_pstn			-	-		<input type="checkbox"/>
5	from_nmse	dest_6xx	Forward	to_ig-lan			-	-		<input type="checkbox"/>
6	from_nmse	-	Forward	to_pstn			-	-		<input type="checkbox"/>
7	-	less5digits	Reject	-			-	-		<input type="checkbox"/>
8	-	-	Auth & Forward	to_pstn			-	-		<input type="checkbox"/>
9	all_ipv4	-	Reject	-			-	-		<input type="checkbox"/>

Add new rows 1 rows.

and this setup should make the MiVoice Connect-Shoretel PBX using three-digit extension numbers starting with 1, reachable from the IG-LAN environment. The IG-LAN PBX environment setup at **SIP Trunk 2: IG-LAN;Mitel MiVoice Connect-Shoretel**

will be reachable by prefix 6 (IG-LAN is using 3-digit extension numbers starting with 6).

If you in 4.2 above, had set up local DNS for IP 10.0.1.76, you could have used that FQDN instead in the Dial Plan and at previous SIP Trunk pages, avoiding repeating 10.0.1.76.

The from\_nmse line under Matching From Header cannot use a network since NMSE is coming from 127.0.0.1 (the internal IP address of the SIParator<sup>®</sup>) instead of the Mitel LAN.

The Dial Plan needs an **Action=Reject** at the end and we have defined (under Networks and Computers) to use instead of the WAN (all at ETH1) that the Start Up Tool uses).

<input type="checkbox"/> + All-IPv4	-	0.0.0.0	0.0.0.0	255.255.255.255	255.255.255.255
<input type="checkbox"/> + All-IPv6	-	::	::	ffff.ffff.ffff.ffff.ffff.ffff	ffff.ffff.ffff.ffff.ffff.ffff

(The All-IPv6 is just shown to indicate that the SIParator<sup>®</sup> also supports SIP over IPv6 – but you need an IPv6 address and DNS setup to use.)

To use authentication in the Dial Plan (as we do on line 6 to allow placing PSTN calls even if you are not on the local inside networks), you need to enable authentication:

The screenshot shows a configuration interface with a top navigation bar containing buttons for Administration, Basic Configuration, Network, HTTP Services, SIP Services, SIP Traffic (highlighted in red), SIP Trunks, Q-TURN, Failover, Virtual Private Networks, and Quality of Service. Below this is a sub-menu bar with buttons for Methods, Filtering, Registrar, Authentication (highlighted in red), Accounts, STIR, Call Control, Dial Plan, Routing, Accounting, Time Classes, IDS/IPS, and Test Agent. The main content area is titled "Brute Force Authentication Protection (Help)" and contains several input fields: "Maximum amount of attempts:" with a value of 10, "Time interval:" with a value of 30 seconds, "Stop responding after interval:" with a value of 300 seconds, and "Max number of clients:" with a value of 1000. Below these fields is a note: "Applies to both pass-through authentication (e.g. authentication by service provider) and to own authentication (enabled below)." A red box highlights the "SIP Authentication" section, which includes two radio buttons: "Enable SIP authentication" (selected) and "Disable SIP authentication". Below this is the "SIP Realm" section with a text input field containing "igcomp.ess-s.ic".

SIP brute force authentication protection as shown is another good setting, especially if the SIParator<sup>®</sup> faces the internet, even if using TLS, to protect against DOS and DDOS attacks.



## 6 Extending Your Mitel MiVoice Connect (MiVC) with more SIP Equipment and Clients by Using the Ingate SIParator® / Firewall Registrar and User Routing

The above PSTN and tie trunking, explained above in 5 Connecting Your MiVC to PSTN SIP Trunk Providers and Other SIP PBXs (tie trunking), can be used to integrate your MiVC PBX with persons and functionality in the SIParator® itself. Here we use SIP-name addressing and 3-digit extension numbers starting with five.

In the Ingate SIParator®, under **SIP Traffic>Routing**. You can define “static registrations”:

**Static Registrations** (Help)

Requests To User	Also Forward To			Delete Row
	User	sip/sips	Transport	
515@igcomp.e	kenneth@igcor	sip ▼	- ▼	<input type="checkbox"/>
516@igcomp.e	kalle@igcomp.	sip ▼	- ▼	<input type="checkbox"/>

Add new rows  rows.

and if buying SRU licenses – SIP Registrar User Licenses – you can use the “User Routing” found in the SIParator® under **SIP Traffic>Routing**, that can be setup for persons or for special SIP equipment or purposes:

**User Routing** (Help)

User	Alias	Restrict Incoming Callers	Forward		Send To Voice Mail	Time Class	Comment	Delete Row
			Action	To				
kalle@igcomp.ess-s.io ▼		No ▼	Parallel ▼	3233235627@.	- ▼	- ▼		<input type="checkbox"/>
kenneth@igcomp.ess-s.io ▼		No ▼	Parallel ▼	3233235622@.	- ▼	- ▼		<input type="checkbox"/>
kenta@igcomp.ess-s.io ▼	564	No ▼	- ▼		After 25 s ▼	- ▼		<input type="checkbox"/>

Add new rows  rows.

The actual SIP registrar in the SIParator® is found under **SIP Traffic>Local Registrar** and on next page you see an example with four users configured:

Changes have been made to the preliminary configuration, but have not been applied.

Methods Filtering **Local Registrar** Authentication Accounts STIR Call Control Dial Plan Routing Accounting IDS/IPS Test Agent Status

**Local SIP Domains** (Help)

Domain	Delete Row
igcomp.ess-s.ic	<input type="checkbox"/>

Add new rows  rows.

**Registrar Limits** (Help)

Timeout for registrations:  seconds Allowed amount of users:  (max 0) Allowed amount of registrations per user:

**Local SIP User Database** (Help)

Username	Domain	Authentication Name	Password	Register From	Comment	Delete Row
kalle	igcomp.ess-s.ic		Change Password	Trusted		<input type="checkbox"/>
karl	igcomp.ess-s.ic	karl	Change Password	Internet		<input type="checkbox"/>
kenneth	igcomp.ess-s.ic		Change Password	Trusted		<input type="checkbox"/>
kenta	igcomp.ess-s.ic		Change Password	Trusted		<input type="checkbox"/>

Add new rows  rows.

Save Undo

This is just an example-setup of the registrar in igcomp's SIPerator®.

The users [\\*@igcomp.ess-s.io](mailto:*@igcomp.ess-s.io) can be reached by extension numbers from the MiVC-ShoreTel environment by the Dial Plan just setup in the previous chapter, EITHER by naming the users 5xx@... or by defining an **Alias** under **SIP Traffic>Routing** (exemplified above).

To allow these users to connect to the outside world via SIP Trunk 4, using US-style numbering plan in area code 323, by a prefix 9, or by mobile phone style numbering starting with +, we can add this to the Dial Plan as shown red-framed below.

This is an example of that (from another Ingate/Intertex product – read more about this kind of usage in <http://www.igmanual.com/examples/sipswexample.asp>). Although Enum isn't used publicly nowadays, it is supported and can be used privately.

Prio	Prefix (stripped)	Head	Tail	Minimum Tail	Action	Forward to (domain or IP address)	Add Prefix Forward	Enum	Enum Root	Comments/explanation
1	+1		0-9, + - # *	10	Enum, Forward		1	1	e164.arpa	Gateway in United States of America, don't want United States of America country code
2	+		0-9, + - # *	6	Enum, Forward		011		e164.arpa	+ prefix to dial full international number without access code
3	9011		0-9, + - # *	6	Enum, Forward		011		e164.arpa	International calls (9 for PSTN line)
4	91		0-9, + - # *	10	Enum, Forward		1	1	e164.arpa	Long distance calls within United States of America (9 for PSTN line)
5	9		0-9, + - # *	7	Enum, Forward		1323	1323	e164.arpa	Local calls within 1323 area (9 for PSTN line)

Matching From Header (Help)

Name	Use This ...		... Or This	Transport	Network	Delete Row
	Username	Domain	Reg Expr			
all_ipv4	*	*		Any	All-IPv4	<input type="checkbox"/>
from_inside	*	*		Any	Local-and-IG	<input type="checkbox"/>
from_nmse	*	10.0.1.76		UDP	-	<input type="checkbox"/>
local127001	*	*		Any	127001	<input type="checkbox"/>

Add new rows 1 rows.

Matching Request-URI (Help)

Name	Use This ...					... Or This	Delete Row
	Prefix	Head	Tail	Min. Tail	Domain	Reg Expr	

dest+			0..9, +, -, #, *	10			<input type="checkbox"/>
dest+1	+1		0..9, +, -, #, *	6			<input type="checkbox"/>
dest9	9		0..9, +, -, #, *	6			<input type="checkbox"/>
dest9011	9011		0..9, +, -, #, *	10			<input type="checkbox"/>
dest91			0..9, +, -, #, *	7			<input type="checkbox"/>

dest_1xx			-			sip:(1[0-9][0-9])@.*	<input type="checkbox"/>
dest_6xx			-			sip:(6[0-9][0-9])@.*	<input type="checkbox"/>
dest_extnumbe			-			sip:(6[0-9][0-9][0-9])@.*	<input type="checkbox"/>
less5digits			0..9, +, -, #, *	4	*		<input type="checkbox"/>

Add new rows 1 rows.

Forward To (Help)

Name	No.	Use This ... Account	... Or This			... Or This		Use Alias IP	Delete Row
			Replacement Domain	Port	Transport	Reg Expr	Trunk		
to_ig-lan	1	-			-		SIP Trunk 2: IG-LAN;Mitel MiVoice Connect	-	<input type="checkbox"/>
to_nmse	1	-			-	\$1@10.0.1.76	-	-	<input type="checkbox"/>
to_pstn	1	-			-		SIP Trunk 4: PSTN_Telavox;Mitel MiVoice Connect	-	<input type="checkbox"/>

Add new rows 1 groups with 1 rows per group.

Dial Plan (Help)

No.	From Header	Request-URI	Action	Forward To	Add Prefix		ENUM Root	Time Class	Comment	Delete Row
					Forward	ENUM				
1	local127001	dest_extnumbers	Forward	to_nmse			-	-		<input type="checkbox"/>
2	from_inside	dest_6xx	Forward	to_ig-lan			-	-		<input type="checkbox"/>
3	from_inside	dest_1xx	Forward	to_nmse			-	-		<input type="checkbox"/>
4	from_inside	-	Forward	to_pstn			-	-		<input type="checkbox"/>
5	from_nmse	dest_6xx	Forward	to_ig-lan			-	-		<input type="checkbox"/>
6	from_nmse	-	Forward	to_pstn			-	-		<input type="checkbox"/>

-	dest+	Forward	to_pstn	1			-	-		<input type="checkbox"/>
-	dest+1	Forward	to_pstn	011			-	-		<input type="checkbox"/>
-	dest9	Forward	to_pstn	011			-	-		<input type="checkbox"/>
-	dest9011	Forward	to_pstn	1			-	-		<input type="checkbox"/>
-	dest91	Forward	to_pstn	1323			-	-		<input type="checkbox"/>

7	-	less5digits	Reject	-			-	-		<input type="checkbox"/>
8	-	-	Auth & Forward	to_pstn			-	-		<input type="checkbox"/>
9	all_ipv4	-	Reject	-			-	-		<input type="checkbox"/>

Add new rows 1 rows.

## 7 APPENDIX 1: Configuring ACME for Using Automatically Updated Certificates, e.g. Free Let's Encrypt Certificates

Release 6.4.X of the Ingate SIParator® / Firewall SBC added Support for Automated Deployment of X.509 Certificates Using the ACME Protocol. This appendix is mainly imported from the [Configuration Guide for Ingate as Teleworker Gateway for Mitel MiVoice Connect and Mitel 6900 phones.](#)


Whenever certificates are required on the public side (the Internet) it is recommended to use automatically frequently updated certificates, such as the free Let's Encrypt certificates. The ACME protocol is used to automatically update such certificates. Thus, the certificates in the SIParator provide high security and the certificates do not need to be manually updated over time.

### 7.1 Enable the ACME Protocol to Allow Self-updating Certificates

(e.g., Let's Encrypt self-updating free certificates)

SIParator® 6.4 added full support to create and manage Let's Encrypt certificates using ACME protocol.

To enable ACME Protocol:

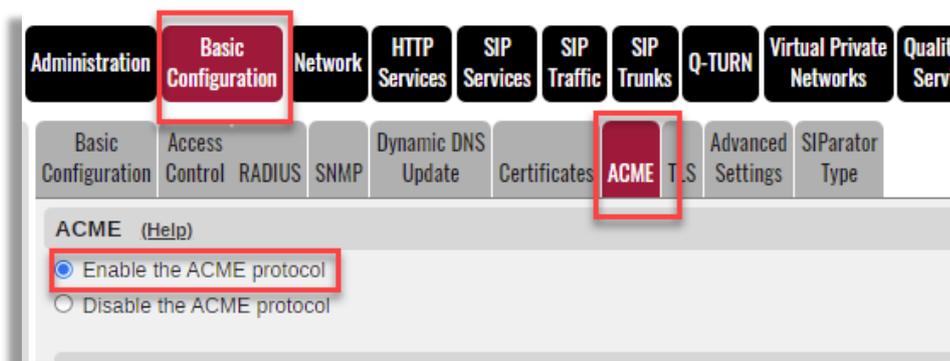

Under Accounts, add a new row, assign a name, fill in the contact information using the following format:

<mailto:youremail@yourcompany.com> (i.e. <mailto:ernesto@ingate.com>)

Once you have completed the contact information click on the “Create New” under Private Key. That will trigger the process to create an account for further use.

**ACME** (Help)

Enable the ACME protocol  
 Disable the ACME protocol

**Accounts** (Help)

Accounts associated with the ACME protocol.

Name	Contact	Private Key	EAB Key ID	EAB HMAC Key	Delete Row
ingatelabs	mailto:ernesto@ingate.com	Create New		Change Secret	<input type="checkbox"/>

Add new rows  rows.

Add a Row under “Services” to point to Let’s Encrypt Servers. Assign any name, but use exactly the URL as shown below (acme-v02.api.letsencrypt.org):

**Services** (Help)

A service that supports the ACME protocol.

Name	Domain or IP	Directory Path	Trusted CA	Delete Row
LetsEncrypt	acme-v02.api.letsencrypt.org	directory	-	<input type="checkbox"/>

Directory Path must point to “directory”

Add a domain row. Here you will associate, via a name, which interface that will be used to connect to Let’s Encrypt Servers and receive challenges (In our case the outside interface), which service and Account that will be used for this named domain.

**Domains** (Help)

Domains that should be available to use with the ACME protocol.

Name	HTTP-01 Challenge Address	Service	Account	Renewal Interval (%)	Delete Row
ingatelabs	Outside (10.0.0.213)	LetsEncrypt	ingatelabs	67	<input type="checkbox"/>

Leave renewal interval at default value of 67%. This controls when the renewal process will be triggered for each Let’s Encrypt managed certificate (every 60-90 days).

In this section we will add the private and CA Certificates needed to properly configure the Teleworker Gateway solution.

Just to refresh, private certificates are those the ingate will use to identify itself, while CA Certificates are the ones used by the SIParator® to validate signage of those certificates presented to it, to make sure those certificates can be trusted.

How are certificates used in SIParator® when deploying Teleworkers?

Two main areas of attention must be clear when deciding certificates needed, first all related to SIP signaling, and secondly the ones needed for other secure services mainly based on secure http happening during most of the advanced functionalities on the phones (Provisioning, phone maintenance, phone configuration, operation, CAS based Services among others)

### 7.1.1 Create Certificates Between the SIParator® and the Remote Phones

Here will be shown how to create the certificates needed for the SIP signaling as well as for the HTTP services.

#### 7.1.1.1 SIP signaling related certificates



Interface eth0 (Inside) will have a certificate signed by HQ Server as explained in Create an HQ signed certificate to be used in the SIParator® internal interface for TLS.

Interface eth1 (Outside) will have a certificate signed by a trusted authority. SIParator® supports integration with Let's Encrypt using ACME protocol and that will make life easier at no additional cost (no need for purchasing signed certificates).


Here we explain how to add Let's Encrypt certificate and then we will explain how to associate both certificates to each interface in the SIP configuration.

**NOTE:** If you decide to use another 3<sup>rd</sup> party CA for this Outside certificate, you must assure that the certificate provider is authorized by the Ingate SIParator®, see considerations in section 8 below.

You must have ACME already configured and enabled as explained in Enable ACME protocol (Let's Encrypt) to manage SIParator® external certificate.

- Go to Basic Configuration → Certificates
- Add a new row to Private certificates

Let's call this certificate "MiVoice LE" (You can assign whatever name you want) and click on Create New

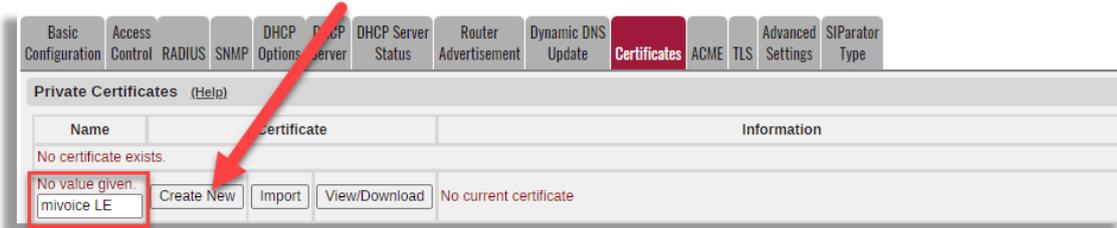

- Fill the information.
  - Expire in days (it doesn't make any difference for Let's Encrypt as they expire every 90 days, but automatically renewed by SIParator®). However, this field is mandatory.
  - Country, Organization, State/Province, Organizational Unit, locality and email. Fill all of them with appropriate information. It is just informational.
  - Common Name (CN) this one must match the FQDN of the SIParator® resolving the public IP. In our case it will be "mivc.ingatelabs.com".

- Let's Encrypt requires Subject Alternate Names extension to be included and DNS must match also the same FQDN mentioned above.

- Leave Key Length and Signature Algorithm on default values
- Enable ACME in the ACME section, assign a serial number if you want and click on create an X.509 certificate request.
- Serial Number is automatically generated, but you can assign any serial you want.

**ACME**

Use the ACME protocol for this X.509 certificate request:  Yes  No

If you generate several certificates with identical data you should make sure they have different s

Serial number:

Fields marked with "\*" are mandatory.

You will see this result screen:

Administration Basic Configuration Network HTTP Services SIP Services SIP Traffic SIP Trunks Q-TURN Virtual Private Networks Quality of Service Logging and Tools About Log out

Changes have been made to the preliminary configuration, but have not been applied.

- Certificate request created:
  - Subject: /C=US/ST=FL/L=Weston/O=Ingate Systems AB/OU=Development/CN=mvvc.ingatelabs.com/emailAddress=ernesto@ingate.com
  - SubjectAltName: DNS:mvvc.ingatelabs.com
- Self signed certificate created:
  - Key Type: RSA
  - Subject: /C=US/ST=FL/L=Weston/O=Ingate Systems AB/OU=Development/CN=mvvc.ingatelabs.com/emailAddress=ernesto@ingate.com
  - Issuer: /C=US/ST=FL/L=Weston/O=Ingate Systems AB/OU=Development/CN=mvvc.ingatelabs.com/emailAddress=ernesto@ingate.com
  - Serial Number: 15081213846106642244
  - Signature Algorithm: sha256WithRSAEncryption
  - MD5 Fingerprint: 35:A0:C2:2F:8D:7F:F7:43:C6:04:47:95:58:DB:45:22
  - SHA-1 Fingerprint: 8718 15E4 50E2 EF14 9A8A 22AE 0322 232E 4988 67B6
  - SHA-256 Fingerprint: B49A 8A6F E85C DC7E 4688 10B4 8A8B 77BA 95C3 E39D 948F 4E8E E49F 5AE3 676D FEB4
  - Valid from 2022-03-21 18:35:36 to 2023-03-21 18:35:36 GMT.

As you can see, a self-signed certificate is generated (it will be used until a signed certificate is received from Let's Encrypt), and also a Signature request is generated to be sent automatically to Let's Encrypt Service.

To make sure the request is sent we need to associate such certificate to one of the ACME created domains. In our case use the previously created domain "ingatelabs"

mvvoice LE	Create New	Import	View/Download	Key Type: RSA Subject: /C=US/ST=Florida/L=Margate/O=Ingate/OU=Support/CN=mvvoice.ingatelabs.com/emailAddress=ernesto@ingatelabs.com Issuer: /C=US/ST=Florida/L=Margate/O=Ingate/OU=Support/CN=mvvoice.ingatelabs.com/emailAddress=ernesto@ingatelabs.com Signature Algorithm: sha256WithRSAEncryption MD5 Fingerprint: 7E A1 23 4C 55 2B E4 D4 58 57 F8 A3 F6 77 6F A2 SHA-1 Fingerprint: 08DF 0E14 24EF DCED 1671 3D8D 4557 96F9 C439 9805 SHA-256 Fingerprint: 35D8 437B 0D3E 09D8 1A21 3B48 353E EDD7 4E8C 3AF9 2F13 5B7B 0608 A331 D2DC 5A2B Valid from: 2022-01-29 00:42:39 Valid to: 2023-01-29 00:42:39	<input type="button" value="-"/> <input type="button" value="v"/> <input type="button" value="ingatelabs"/>	<input type="checkbox"/>
------------	------------	--------	---------------	--	--	--------------------------

Save and apply the changes and after a few minutes you will see the certificate already signed.

mvvoice LE	Create New	Import	View/Download	Key Type: RSA Subject: /CN=mvvoice.ingatelabs.com Issuer: /C=US/O=Let's Encrypt/CN=R3 Signature Algorithm: sha256WithRSAEncryption MD5 Fingerprint: E9 4B B5 AF 06 5B 34 FA 6B 19 E4 16 10 EF DF 43 SHA-1 Fingerprint: 2982 9A8B C519 935B 85B2 065A E81E E7B5 E756 372F SHA-256 Fingerprint: 4EA7 4978 9EE9 776C 4D3D 75CA DDD4 4273 1DDC 862D E4B7 93F3 56CC F6C4 2A0A EC8B Valid from: 2022-01-28 23:48:33 Valid to: 2022-04-28 23:48:32 SubjectAltName: DNS:mvvoice.ingatelabs.com Subject Key ID: F1 BA 24 0C FD 7B 43 18 C3 D0 D9 D6 61 4E 8F D0 C8 BC B1 08 Authority Key ID: 14 2E B3 17 B7 58 56 CB AE 50 09 40 E6 1F AF 9D 8B 14 C2 C6	<input type="button" value="ingatelabs"/>	<input type="checkbox"/>
------------	------------	--------	---------------	---	---	--------------------------

You can confirm it was signed by Let's Encrypt, has a duration of 90 days, and Domains are properly setup and validated.

## 8 APPENDIX 2: Using Ordinary (NOT Self-Upgrading Using ACME) Third-Party CA Certificates

This appendix is mainly imported from the [Configuration Guide for Ingate as Teleworker Gateway for Mitel MiVoice Connect and Mitel 6900 phones.](#)


If you select to use a 3<sup>rd</sup> party CA for the SIParator® external certificates, the ACME protocol is not needed, but you need to specifically add that CA to the SIParator’s authorized bundle<sup>3</sup> and there are two possible scenarios to generate the addition to be made:

### 8.1 Generating CSR (Certificate Signature Request) in the SIParator®

This is a 2 step procedure. First you need to create a signature request in the SIParator®.

#### 8.1.1 Step 1: Produce the Request

Create a new Private Certificate row, and in this example, we will call it “Outside cert”.

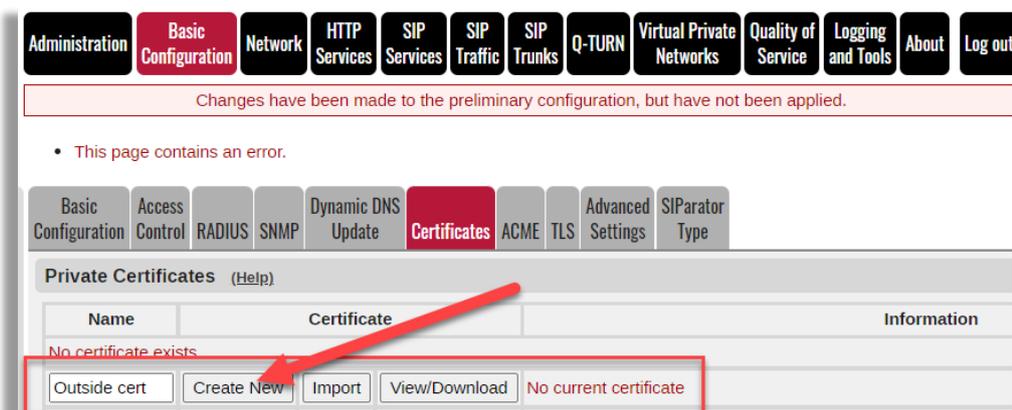

Click on “Create New”

Let’s assume we are using `mivc.ingatelabs.com` FQDN to resolve on SIParator’s external public IP

It should look similar to this:

---

<sup>3</sup> Any 3<sup>rd</sup> party you choose to use must also be trusted by the Mitel 6900 phones, which probably is the case since most of the known Public Certification Authorities already are included in the MiVC environment. Addition of Private Certification Authorities is not supported by Mitel.

**Current Certificate**

No current certificate.

**Create Certificate or Certificate Request**

Fill in the certificate data for "Outside cert" below, then create either a certificate or a certificate request.  
 After generating a certificate request, and having it signed by a signing authority, the certificate must be imported to the device.

Expire in (days): \* 
 Country code (C): 
 Organization (O):

Common Name (CN): \* 
 State/province (ST): 
 Organizational Unit (OU):

Email address: 
 Locality/town (L):

**SubjectAltName Extension**

Enter the alternative names that you want to add to a certificate or a certificate request. Multiple values can be added by using comma separation.

Email:

URI:

DNS:

IP:

**Key Length and Signature Algorithm**

Select the key length and the signature algorithm that you want to use when creating a certificate or a certificate request.

Key length (bits):

Signature algorithm:

**ACME**

Use the ACME protocol for this X.509 certificate request:  Yes  No


If you generate several certificates with identical data you should make sure they have different serial numbers.

Serial number:  
 \*


Fields marked with "\*" are mandatory.

Selecting "Create an X.509 certificate request, and not enabling ACME, will generate a CSR file to be used with the certification authority of your selection (for further signing).

Download then the CSR file:

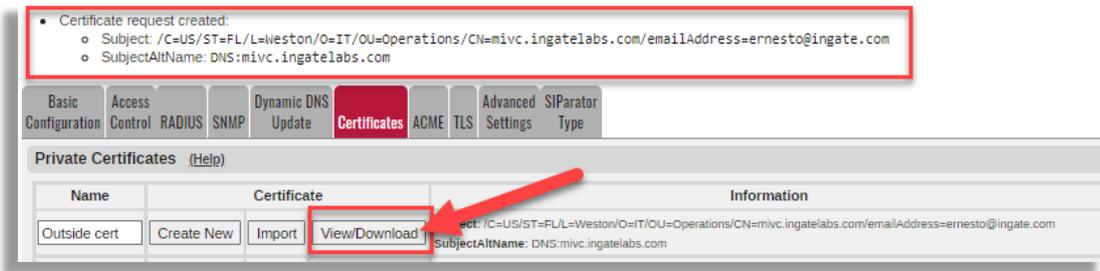

Click on “View/Download”

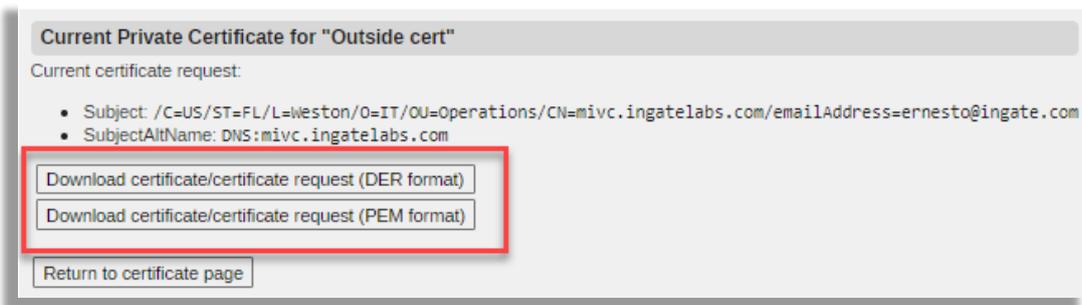

**8.1.2 Download the file in any of the 2 formats offerings depending on which one better fits the requirements of the CA you selected to use.**

### 8.1.3 Step 2: Load the CA Signed Certificate


You will receive a set of files from the selected Certification Authority. Those files include one containing the signed certificate.

As the SIParator was the one generating the CSR, private key is already known, so only a signed certificate is needed.

Load the signed certificate using the “Import” button in the certificate request you created.



Then select and load the file in next screen.

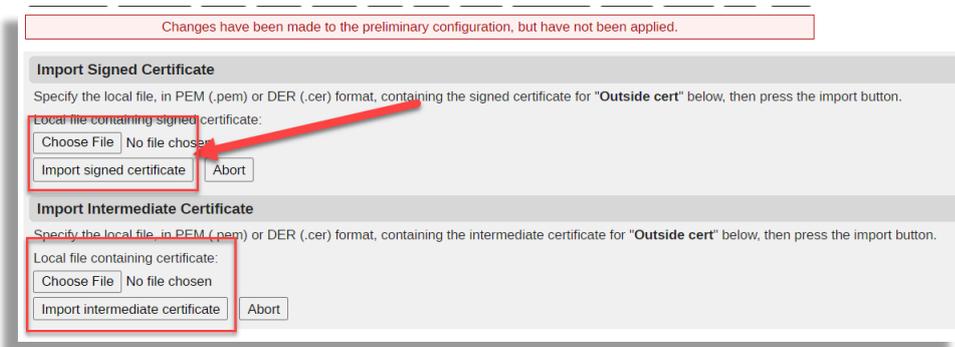


In case you also received a set/bundle of intermediate certificates, they can also be loaded repeating this step, but it is then better to use the options under Import Intermediate Certificates.

### 8.1.4 Not Using the SIParator® to Generate the CSR

In case the SIParator was not used to create the CSR, you will need to just create a new row in the Private Certificates section and import the file provided by the CA, but now the file that includes the Certificate and Private Key.

Note the same screen (under Basic Configuration → Certificates, after adding new row and clicking “Import”) is used to import the certificate and private key in this scenario. It specifically shows “Import Certificate/Key”:

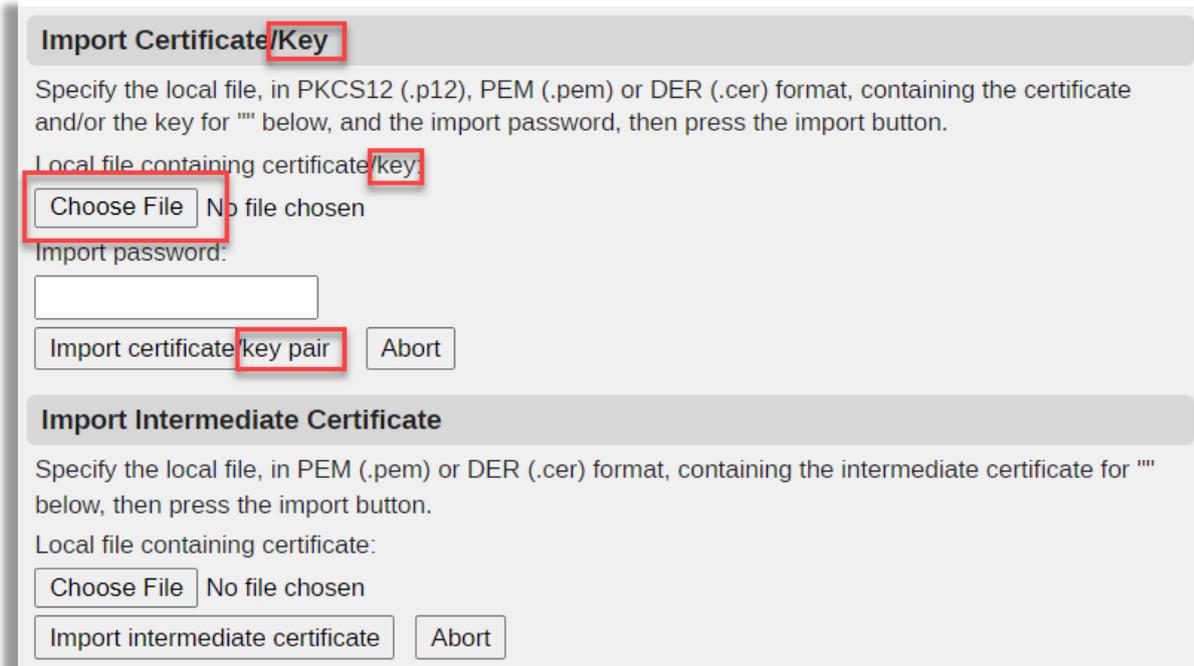


If the file received is protected with a password, make sure you have it and complete in the same screen.

## 9 APPENDIX 3: CA (Certification Authorities) Root Certificates

This appendix is mainly imported from the Configuration Guide for Ingate as Teleworker Gateway for Mitel MiVoice Connect and Mitel 6900 phones.

If not already available in the SIParator® in an existing installation, you always need to upload the CA certificates and CRLs used for authenticating peers using X.509 certificates, including SIP peers using the TLS transport protocol. For the specific needs of the Teleworker Gateway functionality of the SIParator®, we need to use the bundle built inside HQ Server under →Shoreline Data/keystore/certs, named “authorized\_ca\_bundle” to start with.

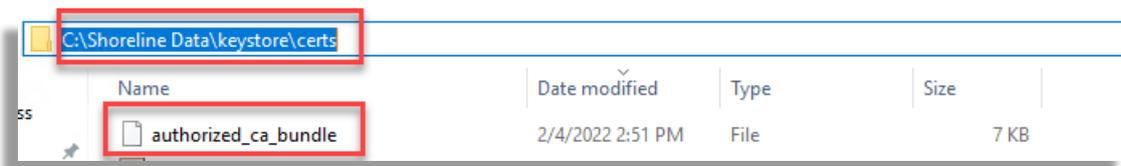

Save it in your local PC and assign “.pem” extension. Thereafter, you most likely need to add one or both of below authorized CA’s before loading the authorized\_ca\_bundle in the SIParator:

### 9.1.1 Add the Mitel Root CA for the Mitel Phones

By the time of this document there is one more root CA needed and not included in the bundle downloaded from the HQ Server in the MiVC environment. It refers to the CA needed to recognize certificate built at factory for phone with MiNET firmware loaded.

Using an editor, add “Mitel Networks Root CA” currently missing from the HQ Server bundle and used as the Trusted CA for the certificate built in 6900s with out-of-the-box MiNET firmware.


This root certificate can be obtained from here: [Mitel Networks Root CA](#) or [here initially](#) .

Copy the content of this last certificate and paste it at the end of the already created authorized\_ca\_bundle.pem. Save the new file as, let’s say, “authorized CA bundle plus Minet.pem”.


In MiVC release 19.3 the new merged bundle file must contain 5 certificates and will look similar to this:



Load the new merged bundle in CA Certificates in the SIParator®. Name assigned in this example “Authorized CA Bundle”:

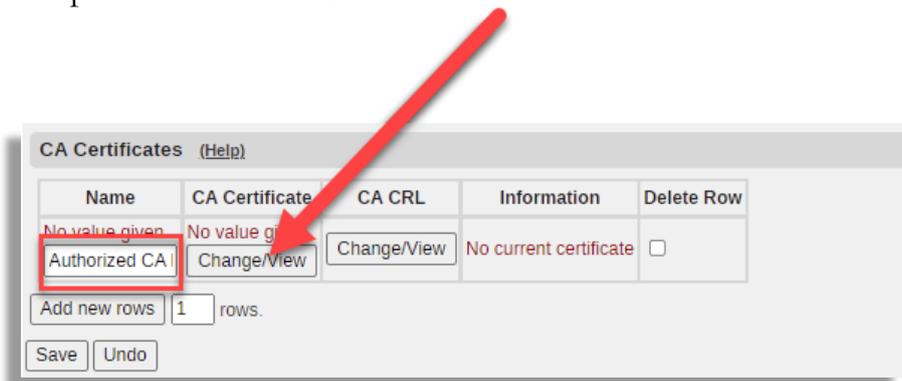

Click on Change/View:

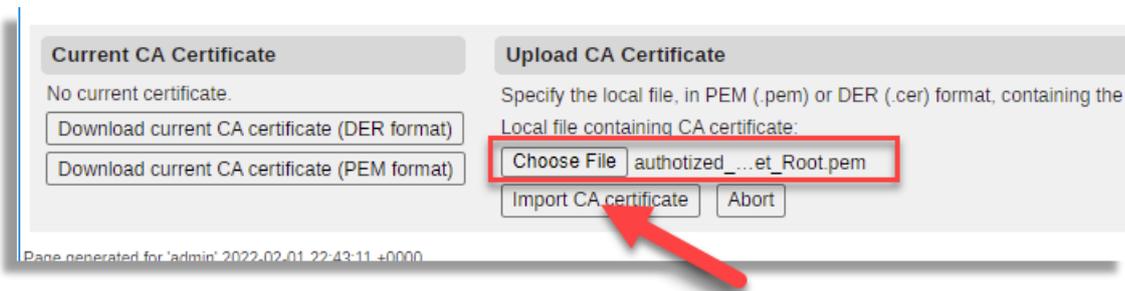

Choose the file and click on Import Certificate.

You should get this result:



and:

Name	CA Certificate	CA CRL	Information	Delete Row
			<p>Key Type: RSA  Subject: C=US,ST=CA,OU=ShoreTel, Inc,OU=Hardware Manufacturing,OU=ShoreTel HW Root CA  Issuer: C=US,ST=CA,OU=ShoreTel, Inc,OU=Hardware Manufacturing,OU=ShoreTel HW Root CA  Signature Algorithm: sha256WithRSAEncryption  MD5 Fingerprint: 74 F02  SHA-1 Fingerprint: 151  SHA-256 Fingerprint: 3  Valid from: 2012-03-12  Valid to: 2042-03-12  Subject Key ID: 0257F7  Authority Key ID: 0257F7</p> <p>Key Type: RSA  Subject: C=US,ST=California,L=Sanjose,OU=ShoreTel, Inc,OU=File Hardware Manufacturing,OU=ShoreTel HW Root CA  Issuer: C=US,ST=California,L=Sanjose,OU=ShoreTel, Inc,OU=File Hardware Manufacturing,OU=ShoreTel HW Root CA  Signature Algorithm: sha256WithRSAEncryption  MD5 Fingerprint: 16 26 32 29 A1  SHA-1 Fingerprint: FACE 842D  SHA-256 Fingerprint: 44A1 AC08  Valid from: 2010-01-01 01:02:09  Valid to: 2038-01-01 00:00:00  Subject Key ID: E5-4A-1E-E1-67  Authority Key ID: E5-4A-1E-E1-67</p> <p>Key Type: RSA  Subject: C=US,ST=California,L=Sanjose,OU=ShoreTel, Inc,OU=HUC Headquarters,OU=ShoreTel UC Certificate Authority  Issuer: C=US,ST=California,L=Sanjose,OU=ShoreTel, Inc,OU=HUC Headquarters,OU=ShoreTel UC Certificate Authority  Signature Algorithm: sha256WithRSAEncryption  MD5 Fingerprint: AB-AB-E1  SHA-1 Fingerprint: 88D D 9  SHA-256 Fingerprint: 202C  Valid from: 2012-01-31 12:00  Valid to: 2032-01-31 00:00  Subject Key ID: F9-8D-0D-9  Authority Key ID: F9-8D-0D-9</p> <p>Key Type: RSA  Subject: C=CA,OU=Intel,OU=Intel Products,OU=Intel Products Root CA  Issuer: C=CA,OU=Intel,OU=Intel Products,OU=Intel Products Root CA  Signature Algorithm: sha256WithRSAEncryption  MD5 Fingerprint: F5D332 98  SHA-1 Fingerprint: 2ECC 1871  SHA-256 Fingerprint: 7014 98  Valid from: 2010-01-01 00:00:00  Valid to: 2042-01-01 00:00:00  Subject Key ID: 02-F9-8D-0D-9  Authority Key ID: 02-F9-8D-0D-9</p> <p>Key Type: RSA  Subject: C=US,ST=CA,OU=ShoreTel, Inc,OU=Hardware Manufacturing,OU=ShoreTel HW Root CA  Issuer: C=US,ST=CA,OU=ShoreTel, Inc,OU=Hardware Manufacturing,OU=ShoreTel HW Root CA  Signature Algorithm: sha256WithRSAEncryption  MD5 Fingerprint: 74 F02  SHA-1 Fingerprint: 151  SHA-256 Fingerprint: 3  Valid from: 2012-03-12 04:12  Valid to: 2042-03-12 04:12  Subject Key ID: 0257F7  Authority Key ID: 0257F7</p>	
Authorized CA	Change/View	Change/View		

NOTE: If you also added 3<sup>rd</sup> party CA Certificates and Intermediates, the total number of imported certificates should show 6 or more.

At this point you are ready with certificates.

## 10 APPENDIX 4: Useful Features in The SIParator

This appendix is mainly imported from the [Configuration Guide for Ingate as Teleworker Gateway for Mitel MiVoice Connect and Mitel 6900 phones](#).

### 10.1 Add SIP Brute Force Authentication Protection

Since the Teleworker Gateway has to listen to SIP communication on standard 5061 port for TLS from the public Internet, it is advisable to protect from malice authentication attempts. The following configuration under SIP Traffic → Authentication is suggested:

Administration
Basic Configuration
Network
HTTP Services
SIP Services
SIP Traffic
SIP Trunks
Q-TURN
Failover
Virtual Private Networks
Quality of Service

Methods
Filtering
Registrar
Authentication
Accounts
STIR
Call Control
Dial Plan
Routing
Accounting
Time Classes
IDS/IPS
Test Agent

**Brute Force Authentication Protection** [\(Help\)](#)

Maximum amount of attempts:

Time interval:  seconds

Stop responding after interval:  seconds

Max number of clients:

Applies to both pass-through authentication (e.g. authentication by service provider) and to own authentication (enabled below).


If the Brute Force Authentication is already configured for the Ingate SIParator® where the Teleworker Gateway function is to be added, judge if it is best left as already setup. At very large installations, judge those limits (which is per IP address trying to authenticate) for normal usage.

## 10.2 Assure that TTL for Media Packets is Enough for Remote Users

One way audio or no audio has occurred because the TTL (counting down for each router hop) has reached zero in complex, long distant scenarios, so the media packets don't reach their destination. This is most likely to happen when one Teleworker phone is calling another Teleworker phone behind another remote NAT, where the media packets have to go via the Teleworker Gateway (instead of directly between the phones).

This has happened with the current version of the 6900s phones (6.2.0.xxx), setting TTL to 64 (verses 128 that would eliminate this unreliability).

In the 6.4.0 version of the SIParator®, a new setting has therefore been introduced under SIP Services → Session and Media:

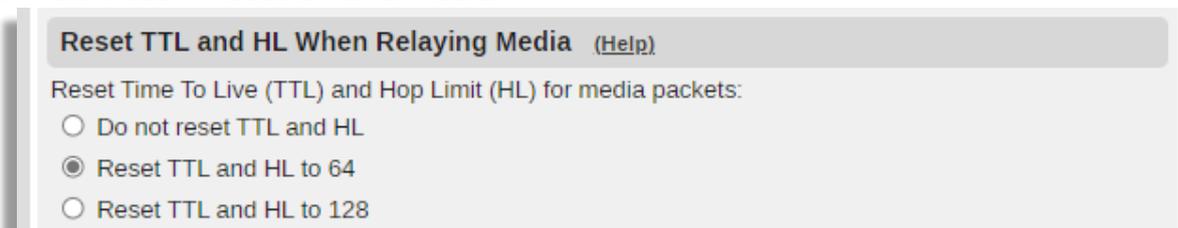

It is recommended that TTL is reset to 64 when the Teleworker Gateway is used with the current version of the 6900s phones. If these phones in a future software release (beyond 6.2.xxx indicated) will increase their TTL to 128, this setting can be set to its default "Do not reset TTL and HL" to restore loop control of media.

## 10.3 Interop Parameters to Adjust


In this section we are showing only the parameters that need to be modified to a different value to the default/recommended setting. If you want to know default/recommended settings, you can review Appendix I.

Adjust or confirm the following parameters under SIP Services → Interoperability:

URI Encoding:



Loose Username Check:

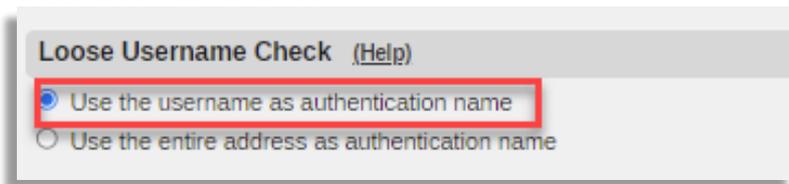

**Loose Username Check** (Help)

Use the username as authentication name

Use the entire address as authentication name

User Matching:




**User Matching** (Help)

Match only on username

Match on username and domain

ContactRouteTag based Routing:

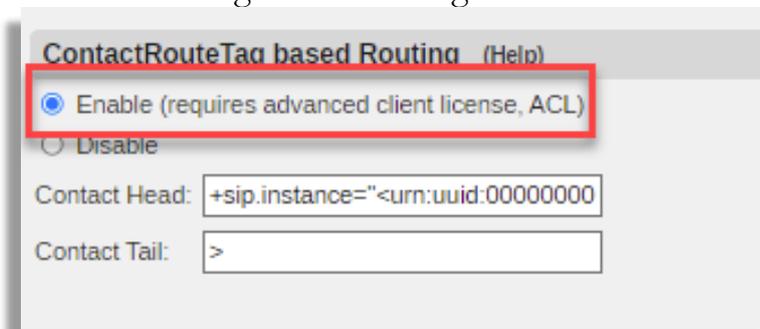

**ContactRouteTag based Routing** (Help)

Enable (requires advanced client license, ACL)

Disable

Contact Head:


Contact Tail:

For MiVC, leave the default values as shown on the Contact Head and Tail in this picture.

None of the settings in this section 10.3 should interfere with an Ingate SIParators® configured for ordinary SIP trunking of MiVC. For further details regarding specific adjustments and typical default/recommended values see Appendix I.

#### **10.4 Enable Remote SIP Connectivity**


Enable the Remote SIP Connectivity, or Far-End NAT Traversal (“FENT”) as it also is called. Change “Media Route:” to “Route media directly between clients behind same NAT (unless some clients are double NATed) and check that the other settings are as shown in the picture below, which are the default values.

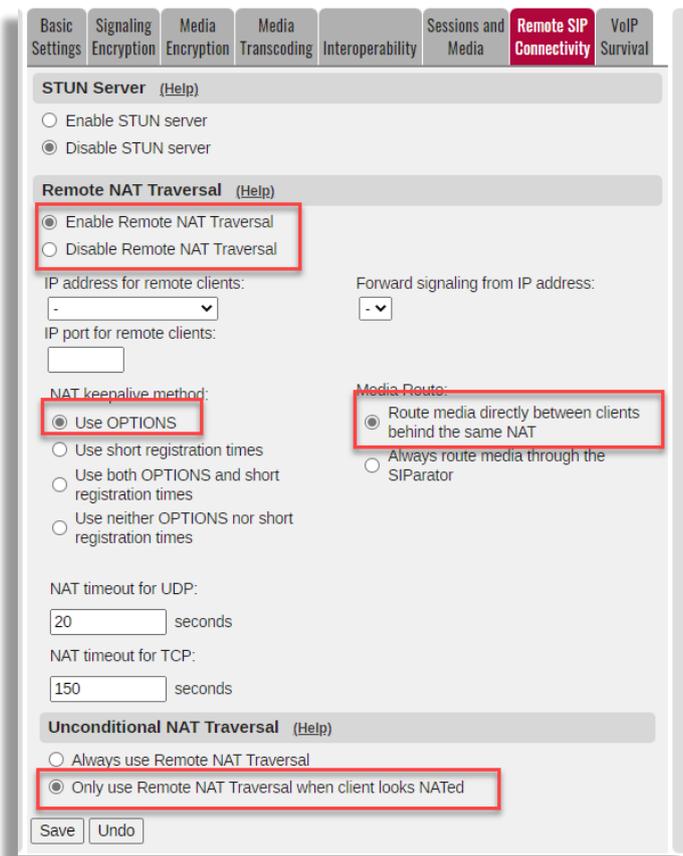

## 10.5 Configure SIP Traffic Filtering to be Without Restrictions

For Teleworkers, where in most cases you have no predictable IPs from where they can connect from, you want to avoid whitelisting of IP address here.<sup>4</sup>

The “Default Policy for SIP Requests” should be left at its default “Process all”.

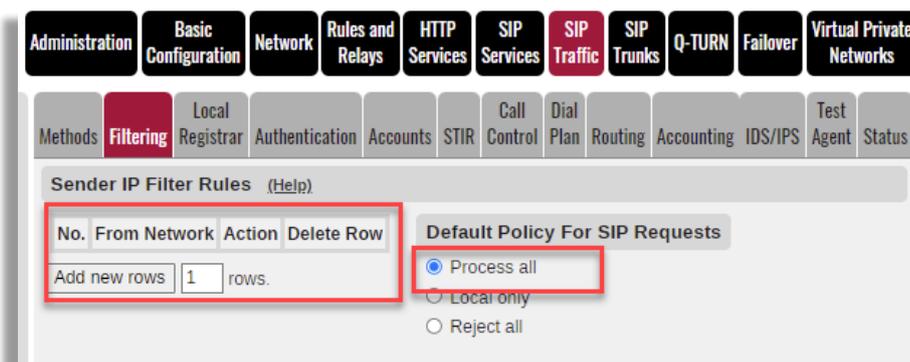

Under the same SIP Traffic → Filtering, we are removing preloaded routes, rather than rejecting them as the default setting is:

<sup>4</sup> If there are other settings already configured here, in an Ingate SIParator® already in use, you need to understand the reason for those and consider whether your intended usage of the Teleworker Gateway can be added to the existing SIParator® or if an additional SIParator for the Teleworker Gateway function must be added.

Preloaded Route Rules [\(Help\)](#)

No.	From Network	Action	Delete Row
<input type="button" value="Add new rows"/>	<input type="text" value="1"/>	rows.	

Default Policy For Preloaded Routes

- Reject
- Authenticate
- Remove
- Allow

# 11 APPENDIX 5: SIParator® HTTP Services Configuration Exemplified

## **Advanced Client License (ACL) - A New Ingate Per User or Per Seat License**

This license makes SIPoWS (SIP over WebSocket, RFC 7118) available for implementing third party WebRTC browser clients, typically using JsSIP, and also adds the advanced and flexible HTTP Services described below, which are much more than ordinary HTTP Reverse Proxy functions.

## **HTTP Support for File Repositories, Load Balancing and CONNECT Tunnels**

A repository defines storage for local and/or remote files available for download via HTTP. Requests to remote HTTP servers can be load-balanced using different schemes and algorithms. HTTP CONNECT tunnels to the Ingate SIParator are firewalled to specific servers (typically on an enterprise LAN).

These functions are used by a major PBX vendor for supporting Teleworkers (SIP phone users behind remote NAT/firewalls over the Internet) over MTLN connections with every additional TCP based feature, automatic configuration, and upgrades as if the PBX vendor's phone appliances were connected on the enterprise LAN.

## **Splitter for Single Port (typically port 443) Usage of HTTP and Any WebSocket Traffic**

The configuration of this WebSocket splitter allows selection of various WebSocket protocols to be handled locally and/or remotely. Plain HTTP/HTTPS traffic using the same port is also handled separately.

This makes the Ingate SIParator® the ideal border element for a wide range of voice and video applications, including and beyond SIP and WebRTC. The Ingate SIParator will both be the load balancing firewall for the application webserver(s) of a protected LAN for the voice and video service and on the same public IP address, on port 443, support RFC 7118 SIPoWSS (as well as SIP over TLS/MTLS on port 5061) at the same time doing all its media related NAT/firewall SBC handling, as well as supporting TURN and Ingate's QTURN (re-TURN proxy). Media using RTP, SDES-SRTP, DTLS-SRTP for SIP and WebRTC are fully supported.

-----

This appendix is mainly imported from the [Configuration Guide for Ingate as Teleworker Gateway for Mitel MiVoice Connect and Mitel 6900 phones](#).

Release 6.4.X of the Ingate SIParator® / Firewall SBC introduced highly useful additional functionality called HTTP Services. Release 7.1.1 added security rate limiting to the HTTP services, see the [reference guide](#). This functionality comes with the ACL license.

## **Advanced Client License (ACL) - A New Ingate Per User or Per Seat License**

This license makes SIPoWS (SIP over WebSocket, RFC 7118) available for implementing third party WebRTC browser clients, typically using JsSIP, and also adds the advanced and flexible HTTP Services described below, which are much more than ordinary HTTP Reverse Proxy functions.

## **HTTP Support for File Repositories, Load Balancing and CONNECT Tunnels**

A repository defines storage for local and/or remote files available for download via HTTP. Requests to remote HTTP servers can be load-balanced using different schemes and algorithms. HTTP CONNECT tunnels to the Ingate SIParator are firewalled to specific servers (typically on an enterprise LAN).


These functions are used by a major PBX vendor for supporting Teleworkers (SIP phone users behind remote NAT/firewalls over the Internet) over MTLs connections with every additional TCP based feature, automatic configuration, and upgrades as if the PBX vendor's phone appliances were connected on the enterprise LAN.

Splitter for Single Port (typically port 443) Usage of HTTP and Any WebSocket Traffic  
The configuration of this WebSocket splitter allows selection of various WebSocket protocols to be handled locally and/or remotely. Plain HTTP/HTTPS traffic using the same port is also handled separately.

These advanced general HTTP Services were developed and introduced for the 6.4.0 version of the SIParator® for the required tunneling for the Teleworker Gateway and for other purposes. The HTTP Services are available under the ACL license, both in SIParator and in Firewall mode. There should not be any conflict in using the HTTP Services for the Teleworker Gateway in a SIParator® already in use (typically for SIP trunking of the MiVC or previous ShoreTel Shoregear PBX).

This is one of the most important sections of configuration for Mitel 6900 series of phones when used by Teleworkers. Here we will control all advanced services besides the SIP communication. In this section we will enable the “HTTP Connect” tunneling that is able to handle all TCP communication transparently, as well as secure access to MiVC private infrastructure.

First, we will enable HTTP Services, Storage Repositories and Tunnels.

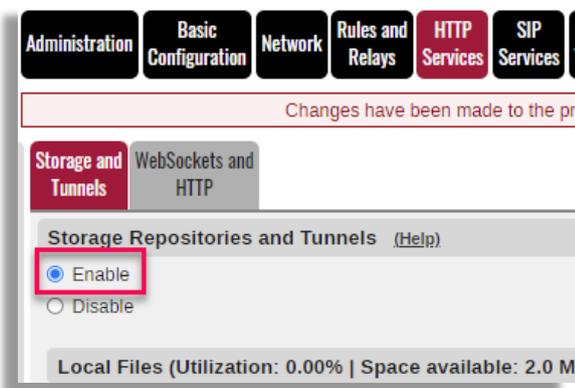

### 11.1 Hosting startup.cfg in the Ingate SIParator®

The Mitel defined file startup.cfg is requested by the teleworker phone at the initial connection to the SIParator®. Follow these steps to host the file in the Ingate SIParator:


### 11.1.1 Local Files

A file hosted locally on the unit. You can edit, upload and download a file. Attach a file entry to one or more Local File Groups. A SHA256 checksum file (with the suffix .sha256) is automatically created for each file entry.


Add a row to Local files to define a locally hosted/cached file.

Let's give it the name of "mitelstartup"

Define the path and the file name it should be found.

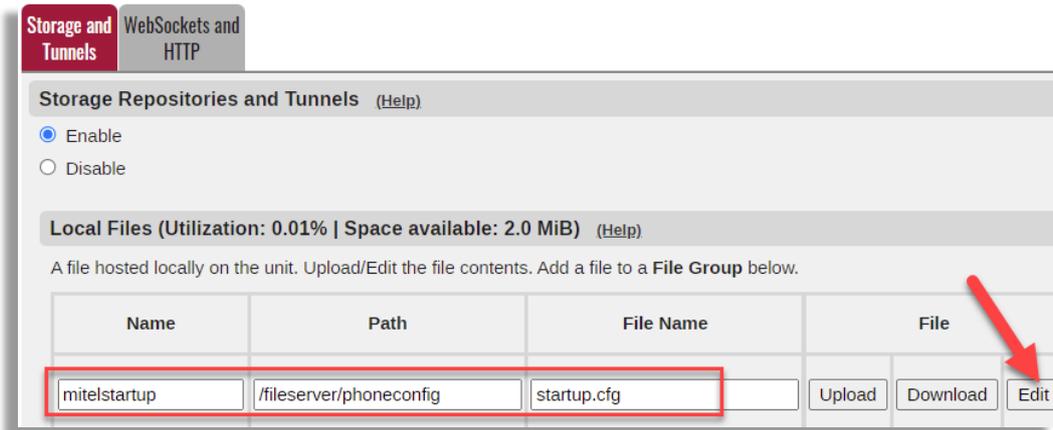

Click Edit to type in the file content. You can also upload or download.

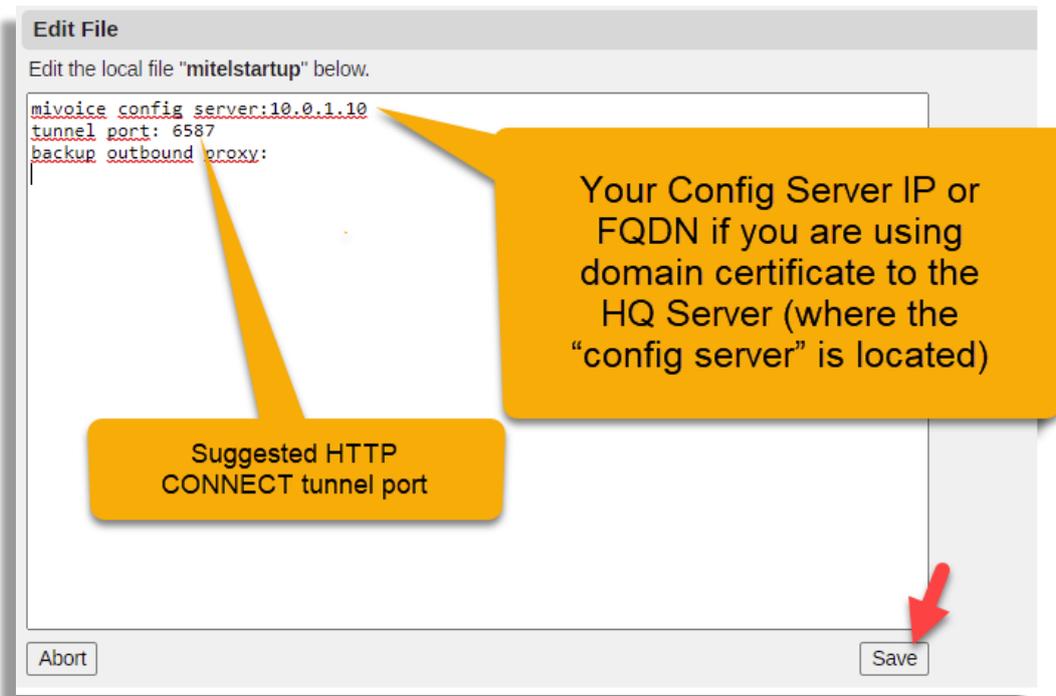

Anything after a "#" is just a comment until end of that line.

Three lines following this format are needed:

**mivoice config server:** <HQ Server ip address/FQDN> [,<secondary IP address/FQDN>[,<...>]]

**tunnel port:** <port used for HTTP CONNECT tunnel> #use 6587

**backup outbound proxy:** <leave blank by now – for future use>


You can use any port number for the HTTP CONNECT tunnel, as far as it is a free and available port from the outside of the MiVC LAN. Ingate recommends ports 6586 (setup elsewhere) for addressing the public side of the Ingate SIParator itself and 6587 for the HTTP CONNECT tunnel, while Mitel’s standard is 443 and 444 that are more likely to be occupied for the customer’s other usage.

**NOTE:** For the first line “mivoice config server:”, in case you are using a domain certificate (as opposed for a certificate for a fixed IP address) for the HQ Server where the “config server” is located, you **MUST** specify an FQDN that resolves to the HQ Server private IP in the MiVC environment, rather than its IP address. Mixing FQDN and IP address will cause **FAILURE**. Also notice that an FQDN for the HQ Server must be resolved in a local DNS server, see section **Error! Reference source not found. Error! Reference source not found..**

### 11.1.2 Local File Groups

A group of files that are hosted locally. Attach a file group to a Repositories and/or Tunnels entry.

Here you will create a group name to associate to all files that are hosted locally. In our case this group will have only one file, already defined in the previous step.

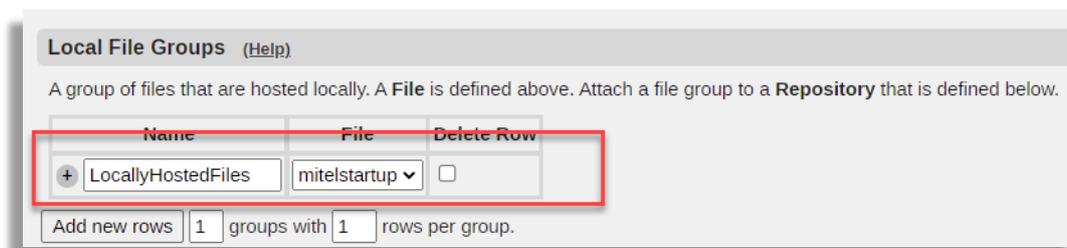

## 11.2 Local Endpoints

A local endpoint serves as an entry point for locally and remotely hosted files. It can also serve as an entry point for HTTP connect tunnels. A Repository must have a local endpoint defined.

Here we will define external ports enabled for certain services (Local Endpoints):

**Local Endpoints** (Help)

A local endpoint serves as an entry point for locally and remotely hosted files. It can also serve as an entry point for HTTP tunnels. A **Repository** must have a local endpoint de

Name	Protocol	IP Address	Port	Server Certificate	Peer Verification		TLS Settings	Allow From	Delete
					Trusted CAs				
NormalHTTPS	HTTPS	eth1	6586	mivoice LE	Authorized CA Bundle		TLSv1.x	Internet	<input type="checkbox"/>
SecureTunnel	HTTPS	eth1	6587	mivoice LE	Authorized CA Bundle		TLSv1.x	Internet	<input type="checkbox"/>

For Teleworkers, only 3 ports are needed, port 5061 for SIP, port 6586 for HTTPS and port 6587<sup>5</sup> for the HTTP Connect tunnels (Mitel's standard is port 443 and 444 instead of 6586 and 6587).

In both cases the protocol to select is https and both are going to use the Let's Encrypt previously generated certificate. In both cases for MTLS, peer verification will be used by selecting the Bundle we created before ("Authorized CA Bundle").

TLS Setting must be any option that includes TLSv1.2. In our case TLSv1.x as we already set it up before.

As Teleworkers' IP addresses generally are not predictable, or even in some cases dynamically changing, we will allow access from "Internet"

### 11.3 Remote Endpoints Server Groups

A group of servers that host files available for retrieval through this unit. Attach a server group to a Remote Endpoint that is defined below. This typically is the Server to reach to obtain version.txt file and latest SIP firmware when the phone has MiNET preloaded firmware.

Here we will need to define remote endpoints groups (in this case remote means in the internal network side), destinations we want to enable to be reached. In our case, the only one we want to reach will be our HQ server (10.0.1.200) on port 443.

**Remote Endpoint Server Groups** (Help)

A group of servers that host files available for retrieval through this unit. Attach a server group to a Remote Endpoi

Name	IP Address	Port	Load Balance		Delete Row
			Weight	Backup	
+ HQServerGroup	10.0.1.200	443		No	<input type="checkbox"/>

Add new rows  groups with  rows per group.

All other internal destinations will be accessible only via http connect tunnels.

<sup>5</sup> Configurable in startup.cfg, see 11.1 Hosting startup.cfg

## 11.4 Remote Endpoints

A remote endpoint defines how remote servers should be contacted. Attach a remote endpoint to a Repository that is defined below.

Definition of specific destinations under a group are known as remote endpoints, and we will need to define which protocol will be used and if it is going to be mutual in the case of TLS by completing “Peer Verification”. Server Name must match CN on the certificate of the Server connecting to.

Name	Protocol	Server Group		Client Certificate	Peer Verification		TLS Settings	Delete Row
		Name	Load Balance		Trusted CAs	Server Name		
HQServer	HTTPS	HQServerGroup	Round-Robin	SIParator cert	Authorized CA Bundle	10.0.1.200	TLSv1.x	<input type="checkbox"/>

**NOTE: Make sure the Authorized Bundle includes the MiNET CA certificate and any 3<sup>rd</sup> Party CA for the HQ Server, as detailed in section 0.**

## 11.5 Repositories and Tunnels

Here we will define repositories to obtain files or tunnels to connect to devices:

. 2. Name: MiteTunnel, Local Endpoint: SecureTunnel, Local File Group: -, Remote Endpoint: -, Allowed Methods: DEFAULT, Tunnel Allow To: MIVC Appliances, Tunnel Ports: (empty), Delete Row: .

To define repositories, “Tunnel - Allow To” must be selected to show “-“.

For the locally hosted files to reach (here only startup.cfg), the appropriate Local File Group must be selected and the HQServer is selected under Remote Endpoints.

Notice we selected DEFAULT Allowed Methods as predefined in the configuration.

Here we created two types of access as mentioned at the beginning of this section, one to be able to reach content via secure MTLs connections and the second to any appliance under Mite Appliances via an HTTPS CONNECT Tunnel terminated at the SIParator® and no restriction to ports.